

# T7 Release 13.0

## Enhanced Order Book Interface

### Manual

Version 1  
Build Version 130.420.3.ga-130005010-101  
Date 5 August 2024

## Disclaimer

### © Deutsche Börse Group 2024

This publication is for informational purposes only. None of the information in this publication constitutes investment advice and does not constitute an offer to sell or a solicitation of an offer to purchase any contract, share or other financial instrument. This publication is not intended for solicitation purposes but only for use as general information. All descriptions, examples and calculations contained in this publication are for illustrative purposes only.

Deutsche Börse AG, Frankfurter Wertpapierbörse (FWB®, the Frankfurt Stock Exchange), Eurex Frankfurt AG, Eurex Deutschland and Eurex Clearing AG do not represent that the information in this publication is comprehensive, complete or accurate and exclude liability for any consequence resulting from acting upon the contents of this or another publication, in so far as no wilful violation of obligations took place or, as the case may be, no injury to life, health or body arises or claims resulting from the Product Liability Act are affected.

Securities traded on the Frankfurt Stock Exchange and Eurex derivatives (other than EURO STOXX 50® Index Futures contracts, EURO STOXX® Select Dividend 30 Index Futures contracts, STOXX® Europe 50 Index Futures contracts, STOXX® Europe 600 Index Futures contracts, STOXX® Europe Large/Mid/Small 200 Index Futures contracts, EURO STOXX® Banks Sector Futures contracts, STOXX® Europe 600 Banks/Industrial Goods & Services/Insurance/Media/Personal & Household Goods/Travel & Leisure/Utilities Futures contracts, Dow Jones Global Titans 50 IndexSM Futures contracts, DAX® Futures contracts, MDAX® Futures contracts, TecDAX® Futures contracts, SMIM® Futures contracts, SLI Swiss Leader Index® Futures contracts, RDXxt® USD - RDX Extended Index Futures contracts, Eurex inflation/commodity/weather/property and interest rate derivatives) are currently not available for offer, sale or trading in the United States nor may they be offered, sold or traded by persons to whom US tax laws apply.

The fund shares listed in XTF Exchange Traded Funds® are admitted for trading on the Frankfurt Stock Exchange. Users of this information service who legally reside outside Germany are herewith advised that sale of the fund shares listed in XTF Exchange Traded Funds may not be permitted in their country of residence. The user makes use of the information at their own risk.

### Legal validity of this disclaimer

In the event that individual parts of or formulations contained in this text are not, or are no longer, legally valid (either in whole or in part), the content and validity of the remaining parts of the document are not affected.

### Trademarks

The following names and designations are registered trademarks of Deutsche Börse AG or an affiliate of Deutsche Börse Group: 1585®; A7®; Buxl®; C7®; CDAX®; CEF®; CEF alpha®; CEF ultra®; CFF®; Classic All Share®; Clearstream®; CX®; D7®; DAX®; DAXglobal®; DAXplus®; DB1 Ventures®; DBIX Deutsche Börse India Index®, Deutsche Börse®, Deutsche Börse Capital Markets Partner®; Deutsche Börse Commodities®; Deutsche Börse Venture Network®; Deutsches Eigenkapitalforum®; DivDAX®; eb.rexx®; eb.rexx Jumbo Pfandbriefe®; ERS®; eTriParty®; Eurex®; Eurex Bonds®; Eurex Clearing Prisma®; Eurex Improve®; Eurex Repo®; Euro GC®; ExServes®; EXTF®; F7®; FDAX®; FWB®; GC Pooling®; GCPI®; GEX®; Global Emission Markets Access – GEMA®; HDAX®; iNAV®; L-DAX®; L-MDAX®; L-SDAX®; L-TecDAX®; M7®; MDAX®; N7®; ODAX®; ÖkoDAX®; PROPRIIS®; REX®; RX REIT Index®; SCHATZ-FUTURE®; SDAX®; ShortDAX®; StatistiX®; T7®; TecDAX®; Technology All Share®; TRICE®; USD GC Pooling®; VDAX®; VDAX-NEW®; Vestima®; Xscreen®, Xemac®, Xentric®, Xetra®; Xetra-Gold®; Xpect®; Xpider®; XTF®; XTF Exchange Traded Funds®; We make markets work®

The names and trademarks listed above do not represent a complete list and, as well as all other trademarks and protected rights mentioned in this publication, are subject unreservedly to the applicable trademark law in each case and are not permitted to be used without the express permission of the registered owner. The simple fact that this publication mentions them does not imply that trademarks are not protected by the rights of third parties.

The STOXX® indices, the data included therein and the trademarks used in the index names are the intellectual property of STOXX Ltd., Zug, Switzerland and/or its licensors. Eurex' derivatives based on the STOXX indices are in no way sponsored, endorsed, sold or promoted by STOXX and its licensors and neither STOXX nor its licensors shall have any liability with respect thereto.

STOXX iSTUDIO® is a registered trademark of STOXX Ltd., Zug, Switzerland.

TRADEGATE® is a registered trademark of Tradegate AG Wertpapierhandelsbank.

EEX® is a registered trademark of European Energy Exchange AG.

Flexible is better.® is a registered trademark of Axioma, Inc.

# Contents

<b>1</b>	<b>List of Abbreviations</b>	<b>4</b>
<b>2</b>	<b>Introduction</b>	<b>6</b>
2.1	Purpose of this document	7
2.2	Document Outline	7
2.3	Further Reading Material	8
<b>3</b>	<b>Characteristics</b>	<b>9</b>
3.1	Functional Characteristics	9
3.2	Technical Characteristics	9
<b>4</b>	<b>Order Book Management</b>	<b>11</b>
4.1	Building the Order Book	13
4.2	Adding an Order	15
4.3	Identifying an Order	15
4.4	Modifying an Order	16
4.5	Deleting an Order	16
4.6	Order Executions	16
4.7	Trade Statistics	18
4.8	Auctions	18
4.9	Product and Instrument States	19
4.10	Intra-day Created Complex Instruments	19
4.11	T7 Entry Service (TES) Trades	20
4.12	Manual Trade Entry and Trade Reversal	20
4.13	Reference Price and (Auction) Price Without Turnover for Cash Markets	21
4.14	Algorithmic Trade Indicator for Cash Markets	21
4.15	Heartbeats	22
4.16	Recovery	22
<b>5</b>	<b>Timestamps</b>	<b>25</b>
<b>6</b>	<b>Availability of Enhanced Order Book Service</b>	<b>27</b>
<b>7</b>	<b>Message Formats</b>	<b>29</b>
7.1	Datagram Structure	29
7.2	Incremental Messages	31
7.3	Snapshot Messages	32
7.4	Data Types	35
<b>8</b>	<b>Message Layout</b>	<b>37</b>
8.1	Overview of Supported Message Types	37
	General	38
	Trade Data	38
	Order Data	38
	State Change	38
	Reference Data	38
	Snapshot	39
8.2	General	40
	Packet Header	40
	Heartbeat	42
8.3	Trade Data	43
	Execution Summary	43
	Quote Request	46
	Cross Request	47
	Trade Report	49

Trade Reversal . . . . .	52
TES Trade Report . . . . .	54
8.4 Order Data . . . . .	56
Order Add . . . . .	56
Top of Book . . . . .	58
Order Modify . . . . .	59
Order Modify Same Priority . . . . .	62
Order Delete . . . . .	64
Order Mass Delete . . . . .	66
Partial Order Execution . . . . .	67
Full Order Execution . . . . .	69
Auction Best Bid/Offer . . . . .	71
Auction Clearing Price . . . . .	73
8.5 State Change . . . . .	75
Product State Change . . . . .	75
Mass Instrument State Change . . . . .	77
Instrument State Change . . . . .	83
8.6 Reference Data . . . . .	88
Add Complex Instrument . . . . .	88
Add Flexible Instrument . . . . .	92
Add Scaled Simple Instrument . . . . .	94
8.7 Snapshot . . . . .	96
Product Summary . . . . .	96
Instrument Summary . . . . .	98
Snapshot Order . . . . .	105
<b>A Appendix</b>	<b>106</b>
A.1 Product Scope . . . . .	106
A.2 Synthetic Prices . . . . .	106
A.3 Connecting T7 EOBI and T7 ETI data . . . . .	107
A.4 Multicast addresses for T7 EOBI . . . . .	109
A.5 Reference data for T7 EOBI . . . . .	109
A.6 Packet classification in the IP protocol header . . . . .	110
<b>B Change log</b>	<b>111</b>

## Contents

### 1 List of Abbreviations

The following are the abbreviations and definitions used in this manual:

<b>BBO</b>	<b>B</b> est <b>B</b> id and <b>O</b> ffer (can refer to price and size).
<b>CRE</b>	<b>C</b> ommon <b>R</b> eport <b>E</b> ngine
<b>FIX</b>	<b>F</b> inancial <b>I</b> nformation <b>eX</b> change. The FIX Protocol is a series of messaging specifications for the electronic communication of trade-related messages.
<b>HHI</b>	Herfindahl-Hirschman Index
<b>IPS</b>	<b>I</b> nter <b>P</b> roduct <b>S</b> preads, realised as Complex Instruments with multiple legs, in general belonging to a set of future products.
<b>Live - Live</b>	Concept whereby data is disseminated simultaneously via two separate channels called "Service A" and "Service B".
<b>Match Step</b>	Product-wide day-unique identifier for each price level of the match event.
<b>OCO</b>	One-Cancels-the-Other order.
<b>Out-of-Band</b>	Incremental-messages and Snapshot-messages are delivered on different multicast channels.
<b>Potential Auction Price</b>	If the order book becomes crossed during an auction, then a potential auction price is formed and communicated to all participants.
<b>T7</b>	T7 trading system developed by Deutsche Börse Group.
<b>T7 EMDI</b>	T7 <b>E</b> nhanced Price Level aggregated <b>M</b> arket <b>D</b> ata <b>I</b> nterface
<b>T7 EOBI</b>	T7 <b>E</b> nhanced <b>O</b> rders <b>B</b> ook Market Data <b>I</b> nterface
<b>T7 EOBI Channel</b>	T7 EOBI snapshot and incremental feeds consist of several channels, each of which delivers the information for a group of products. All channels are sent on two different multicast addresses via different physical connections (Service A and Service B). Both services are identical in terms of the information provided.

<b>T7 ETI</b>	T7 <b>E</b> nhanced <b>T</b> rading <b>I</b> nterface
<b>T7 MDI</b>	T7 netted Price Level aggregated <b>M</b> arket <b>D</b> ata <b>I</b> nterface
<b>T7 RDF</b>	T7 <b>R</b> eference <b>D</b> ata <b>F</b> ile
<b>T7 RDI</b>	T7 <b>R</b> eference <b>D</b> ata <b>I</b> nterface
<b>TES</b>	T7 Entry Service

This manual uses conventions to highlight certain words and phrases and draw attention to specific pieces of information.


Therefore, all message names related to T7 Enhanced Order Book Interface feeds are in `fixed width font like this` and all field names are in *italic* to separate them from ordinary text. **Bold** highlighting will be used when a new term is introduced, or to emphasize the importance of a word.

## 2 Introduction

The **T7 Enhanced Order Book Interface (T7 EOBI)** provides the entire visible order book, by publishing information on each individual order and quote side, along with executions and state information in real-time and in an un-netted manner. The interface is available for a selected group of derivatives market benchmark products and all cash market products (see Appendix [A.1 Product Scope](#)) and provides an alternative to recipients of the T7 Enhanced Market Data Interface (T7 EMDI).

Though most of the functional concepts used are similar to those of T7 EMDI, the interface provides greater transparency and efficiency, together with a high throughput at minimal latency. The T7 EOBI disseminates public market data with the following features:

- A full order depth feed; there is no depth restriction.
- Information is sent in form of fixed-length binary messages.
- Intelligent packing of messages into a datagram by including repetitive entities only once in a message.
- Utilization of the widely adopted FIX standard to decrease integration efforts and on-going support costs.
- Corresponding reference data information is available via the existing T7 Reference Data Interface (T7 RDI) and the T7 Reference Data Files (T7 RDF).
- Dissemination of incremental messages (following state changes) and all Snapshot messages follow a publishing in sequence based on:
  1. Side (bid first, offer second),
  2. Price (best price first),
  3. Time (highest time-priority first).

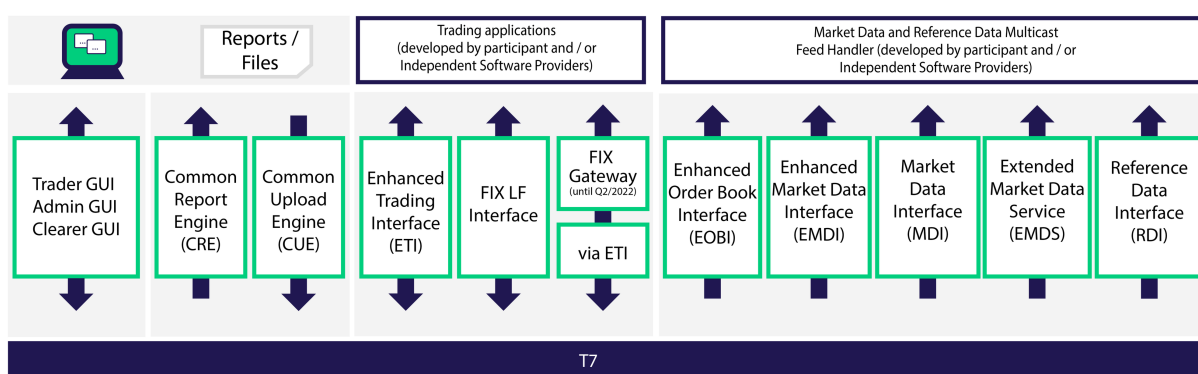

Picture 1 – Interface Landscape of T7

As depicted above, the interface provides an additional market data interface alongside the existing T7 EMDI and T7 MDI interfaces.

The T7 EOBI is designed for participants that rely on **low-latency** at a high throughput with a **high band-width network**. The interface disseminates all visible orders and quotes without any depth restriction, when the order books are open, along with order executions and state

information via incremental messages in un-netted manner. Furthermore, snapshot messages always carry existing visible orders and quotes without any depth restriction at the time of sending.

Multicast address and port combinations of T7 EOBI are different from T7 EMDI and T7 MDI.

T7 EOBI does not offer any layout-level backward compatibility feature between two releases, and within the lifetime of a release Deutsche Börse Group reserves the right to change the behavior of some fields in the different layouts.

## 2.1 Purpose of this document

The purpose of this document is to provide guidance for programmers developing applications that receive public market data from the T7 EOBI feeds.

It covers a complete reference, describes the general business behavior and provides concepts for the implementation.

The most recent version is available at:

[www.eurex.com](http://www.eurex.com) > [Support](#) > [Initiatives & Releases](#) > [T7 Releases](#) > [T7 Release 13.0](#) > [System Documentation](#) > [Market & Reference Data Interfaces](#)

or

[www.xetra.com](http://www.xetra.com) > [Technology](#) > [T7 trading architecture](#) > [System documentation](#) > [Release 13.0](#) > [Market and Reference Data Interfaces](#).

## 2.2 Document Outline

The following chapter, [Chapter 3 Characteristics](#) gives an overview of the functional and technical features of the T7 Enhanced Order Book Interface.

[Chapter 4 Order Book Management](#) outlines the availability of messages, the initial build-up of the order book, and the processing of order book updates.

[Chapter 5 Timestamps](#) provides an overview of timestamps referred throughout the document.

[Chapter 6 Availability of Enhanced Order Book Service](#) presents the availability of the Enhanced Order Book Interface according to the state of trading during the day.

[Chapter 7 Message Formats](#) outlines the general structure of messages sent out over the T7 Enhanced Order Book Interface, followed by the specific individual message layouts in [Chapter 8 Message Layout](#).

[Chapter A Appendix](#) describes:

- the product scope of this interface, (see [Appendix A.1 Product Scope](#)),



- where synthetic pricing information can be found, (see Appendix [A.2 Synthetic Prices](#)),
- how public market data and private data can be synchronized between T7 EOBI and T7 Enhanced Transaction Interface (T7 ETI). (see Appendix [A.3 Connecting T7 EOBI and T7 ETI data](#)),
- how the reference data can be extracted from T7 RDI and/or T7 RDF (see Appendix [A.5 Reference data for T7 EOBI](#)),
- how the Type of Service Field (TOS Field) of the IP protocol header is used in T7 EOBI for Packet classification (see Appendix [A.6 Packet classification in the IP protocol header](#)).

## 2.3 Further Reading Material

Deutsche Börse Group recommends participants to be familiar with the concepts described in the following documents:

- T7 Functional and Interface Overview
- T7 Functional Reference
- T7 Market and Reference Data Interfaces Manual
- T7 Extended Market Data Service Manual
- T7 Enhanced Trading Interface Manual
- Fixed-length binary messaging related documentation

Deutsche Börse Group related documents are available at:

[www.eurex.com](http://www.eurex.com) > Support > Initiatives & Releases > T7 Releases > T7 Release 13.0

or

[www.xetra.com](http://www.xetra.com) > Technology > T7 trading architecture > System documentation > Release 13.0.

FIX-messages and FIX-tag related information is available at:

[www.fixtradingcommunity.org](http://www.fixtradingcommunity.org) > FIX Application Layer

[www.fixtradingcommunity.org](http://www.fixtradingcommunity.org) > FIXimate

Also FIX wiki (same as FIXimate but with additional annotations) is available at:

[www.fixtradingcommunity.org](http://www.fixtradingcommunity.org) > FIXwiki

## 3 Characteristics

The T7 EOBI is based on the same concepts as the T7 EMDI. However, there are some functional and technical characteristics that distinguish the T7 EOBI from T7 EMDI.

### 3.1 Functional Characteristics

The T7 EOBI disseminates:

- The instrument identifier, side, price, priority timestamp and quantity of each visible order and quote side.
- Trade price and traded quantity for each executed on-exchange trade.
- Order book information disseminated without any depth limitation.
- The trading status of each product and corresponding instruments.
- Intra-day changes regarding complex instruments.
- Request for Quotes and Cross Trade Announcements.
- Manually entered trades and trade reversals by Deutsche Börse Group Market Supervision.
- Recovery via T7 EOBI snapshots.

Each order and quote can be **uniquely** identified by the combination of instrument identifier, side and priority timestamp.

In order to send public market data as fast as possible, the T7 EOBI publishes only very specific market information. However, participants can derive certain information themselves based on the messages sent out by T7 EOBI. The following information is not explicitly provided, however can be derived, if needed (from here onwards the term *order* is used to refer both to *orders* and *quotes*):

- Price levels: can be derived from individual orders.
- Aggregation at price levels: can be derived from individual orders.
- Information about synthetic prices: can be derived from visible orders received on the T7 EOBI feed.
- Fully matched incoming visible orders: can be derived from execution messages.
- Trade statistics are not provided via the incremental channel to keep the size of messages as small as possible. They can be derived from the order execution messages sent out on the T7 EOBI incremental channel. But, on the other hand, trade statistics are sent out on the T7 EOBI snapshot channel for recovery purposes.

### 3.2 Technical Characteristics

The T7 EOBI contains similar technical characteristics as the T7 EMDI, such as “Live - Live” multicast, distribution mode and sequence numbering schemes. Anticipating a high load, the size of messages is kept as small as possible.

The following are highlights of the technical characteristics of the T7 EOBI :

- Low-latency multicast for data dissemination with “Live - Live” concept.

- Fixed length optimized message layouts without any compression.
- Uses push-based publishing model in Out-Of-Band distribution mode.
- Packet and message sequence number schemes (same as on the T7 EMDI feed). However, as opposed to T7 EMDI/MDI/RDI, the field *SenderCompID* will be absent in both the Packet Header and the Message Header and packet sequence numbers are incremented per channel only. Additionally the *MarketSegmentID* will be provided in the Packet Header only.
- Gateway-In timestamp, *RequestTime (5979)*, as part of orders.
- Matching Engine-In timestamp, *AggressorTime*, as part of order executions.
- Little Endian and basic data types are used.
- Message padding for better byte alignment.
- Recovery via T7 EOBI snapshot channel as similar to T7 EMDI.

All messages are designed to be as small as possible and are following FIX 5.0 SP2 semantics. The maximum number of bytes per transmission unit (MTU) is limited to 1372 bytes.

The rule for the **distribution sequence** across partitions is as follows:

**Even partitions:** Publish on Service A first, then on Service B.

**Odd partitions:** Publish on Service B first, then on Service A.

The above rule is applied by using the field *PartitionID*. It is available in the Product Snapshot message via the T7 RDI and T7 RDF and in the packet header of T7 EOBI.

All functional and technical reference data information needed for the T7 EOBI is provided by the T7 RDI and/or T7 RDF, similar to the current procedure for the T7 EMDI. The multicast addresses and ports for both services are disseminated in the product reference information. Multicast addresses and port information don't change during trading hours (see [Appendix A.5 Reference data for T7 EOBI](#)).

## 4 Order Book Management

The T7 EOBI provides an **explicit** message for each order book update by publishing the instrument identifier, side, price, displayed quantity, priority timestamp and Gateway-In timestamp of each visible order in the entire order book, along with the order execution and state information. The order book information will be published for all products which are enabled on T7 EOBI. As described earlier, each order is uniquely identified by the combination instrument identifier, side and priority timestamp.

An outline of the **visibility** of orders on the T7 EOBI is shown below:

Order Type	Visible in Order book
Regular Limit Order	yes
Quote	yes
Triggered Order – Closing Auction Only	no
Triggered Order – Stop Limit Order	yes
OCO	yes
Regular Order – GFD / GTC / GTD	yes
All types of Market Orders	cash products only
Stop Market Order (un-triggered)	no
Stop Limit Order (un-triggered)	no
Regular Limit Order – IOC	no
All types of Rejected Orders	no

**Table 1 – Visibility of orders on the T7 EOBI**

For each instrument within a product, snapshot messages can be received via the T7 EOBI snapshot channel to build the initial order book. Once the initial order book is built, the order book must be maintained using the corresponding order book updates received on the T7 EOBI incremental channel. On the T7 EOBI incremental channel, order messages are used by participants to maintain the order book, while explicit state change messages are provided to communicate current product and instrument state. Intra-day complex instrument changes will also be communicated via the T7 EOBI incremental channel.

To assist fine filtering and error discovery on the participant side, the T7 EOBI keeps messages in line using a multi-sequencing paradigm. It uses the following two sequencing methods: **packet sequence number** and **message sequence number**.

### Packet Sequencing

Each packet on the T7 EOBI feeds is sequenced using contiguous packet sequence numbers. The packet sequence number is incremented for each packet across products on the same feed.

### Message Sequencing

In addition to packet sequencing, each product on the T7 EOBI feeds is sequenced contiguously by using message sequencing. This should allow participants to filter products of interest only. The message sequence number is incremented per product across the different message types.

The following sections describe the order book management with respect to the messages sent over the T7 EOBI.

Message layouts can be identified by the *TemplateID* field which is the (exchange wide) unique identifier for the message layout, and is included in each Message Header. The *TemplateID* also determines the fixed size of the message.

Message	Template ID
Order Add	13100
Order Modify	13101
Order Modify Same Priority	13106
Order Delete	13102
Order Mass Delete	13103
Partial Order Execution	13105
Full Order Execution	13104
Execution Summary	13202
Auction Best Bid Offer	13500
Auction Clearing Price	13501
Top Of Book	13504
Product State Change	13300
Instrument State Change	13301
Cross Request	13502
Quote Request	13503
Add Complex Instrument	13400
Add Flexible Instrument	13401
Trade Report	13201
TES Trade Report	13203
Trade Reversal	13200
Product Summary	13600
Instrument Summary	13601
Snapshot Order	13602
Heartbeat	13001

Table 2 – T7 EOBI messages with assigned template IDs

## 4.1 Building the Order Book

Product and instrument reference data information required to process the T7 EOBI market data is provided by the T7 RDI and/or T7 RDF, similar to the current procedure for T7 EMDI (see Appendix A.5 Reference data for T7 EOBI).

Messages in the T7 EOBI snapshot channels are grouped by product. In order to build an initial order book, participants subscribe to the T7 EOBI snapshot channel. The content of one **snapshot cycle** for one product is denoted in Picture 6 (see 7.3 Snapshot Messages). The individual orders in the order book are represented in the snapshot message using the Snapshot Order messages. The snapshot messages contain the field *LastMsgSeqNumProcessed* to enable participant synchronization between the T7 EOBI snapshot channel and the T7 EOBI incremental channel.

While subscribed to the T7 EOBI snapshot channel, participants should keep processing incoming data from the T7 EOBI incremental channel. Any incoming incremental messages with a sequence number higher than the *LastMsgSeqNumProcessed* received in the snapshot message should be applied to the order book after the full snapshot message is processed.

The following data is provided via the T7 EOBI snapshot channel:

- Product State information,
- Instrument State information,
- Trade Statistics per instrument,
- All visible orders in the order book.

During the Continuous Trading instrument state, all visible orders in the order book will be published on the T7 EOBI incremental channel.

During the Auction instrument state, the T7 EOBI snapshot channel will broadcast auction information, Best Bid and Offer (BBO) or the auction clearing price (indicative auction price), only. After the auction phase, trades that took place during the auction will be published using the Trade Report messages, before the corresponding state changes.

As soon as trading is in the state Continuous, all visible orders in the order book will be immediately published on the T7 EOBI incremental channel.

The sequencing of the data in a snapshot cycle is based on the product identifier, the instrument identifier and on the price level. For the product and instrument identifier, the **sending order sequence** is ascending and the orders are sorted from best to worst prices (buy orders are sorted from highest to lowest, and sell orders from lowest to highest).

The visible orders are sent alternating between buy and sell sides, where orders at the same price level are sorted by order time priority from the oldest to the newest order. The visible order book is disseminated per price level in a zig-zag manner, meaning both the sides (Bid and Offer) at each price level are disseminated before moving on to the next price level. If one side providing more orders on the same price level as the opposite side, all orders of the same price level are processed before switching to the next price level.

Assuming the following arbitrary order book is sorted according to imaginary order priority timestamps and order prices where in the orders with the same order prices are sorted according to imaginary order priority timestamps.

Buy	Sell
Order <sub>B1</sub> 100.05	Order <sub>S1</sub> 100.50
Order <sub>B2</sub> 100.05	Order <sub>S2</sub> 100.55
Order <sub>B3</sub> 99.95	Order <sub>S3</sub> 100.55
Order <sub>B4</sub> 99.90	Order <sub>S4</sub> 100.55
Order <sub>B5</sub> 99.00	Order <sub>S5</sub> 101.00
Order <sub>B6</sub> 97.00	

Picture 2 – Order book in a zig-zag manner

As it can be seen from table above, the orders denoted by B1, B2 and S1 are on the first price level. The orders denoted by B3, S2, S3 and S4 are on the second price level. The orders B4

and S5 are on the third price level. In price level fourth and fifth buy orders exists only.

The resulting sending order sequence in zig-zag fashion is: B1, S1 and B2, B3, S2, S3, S4, B4, S5, B5 and B6.

The following data is not provided via the T7 EOBI snapshot channel:

- Cross Trade Announcements / Cross Requests,
- Requests for Quotes,
- Intra-day created complex instruments,
- Manually entered trades by Deutsche Börse Group Market Supervision,

These messages will be published on the T7 EOBI incremental channel only. The snapshot messages will contain all order book information about the intra-day created complex instruments. Please note that the intra-day created complex instruments are published on the T7 RDI snapshot and incremental channel as well.

## 4.2 Adding an Order

An `Order Add` message will be sent each time a visible order is added to the order book of the corresponding instrument. The message includes the instrument identifier, priority timestamp, side, price, displayed quantity of the order and its Gateway-In timestamp.

The `Order Add` message includes among other the priority timestamp and side, which are to be used as the instrument-wide **unique identifier** of this order, as long as the order is not modified (see [4.4 Modifying an Order](#)). The instrument identifier, priority timestamp and side will be the reference key for all future updates for the order (see [4.3 Identifying an Order](#)).

Information about an incoming order, that matched fully against to one or more orders in the order book, can be derived from the associated execution messages or execution summary only.

The remaining part of an incoming order that matches partially will be reported with an `Order Add` message after all associated executions.

The `Order Add` messages also include the Gateway-In (conveyed by *RequestTime (5979)*) of the order, which conveys when the corresponding order transaction has been received by the Gateway. Please note that *RequestTime (5979)* will not be set in case of a self triggered transaction (without any external actor). For ex. a state change resulting in opening of the book.

## 4.3 Identifying an Order

Participants are able to identify their own orders on the T7 EOBI by using the unique identifier, the priority timestamp and side, as stated earlier.

In order to provide participants with the priority timestamp of the orders, the field *TrdRegT-STimePriority*, will be provided in the Order messages of the T7 EOBI and in the T7 ETI responses.



In order to identify matching of own orders, the priority timestamp of the order and a unique match step identifier for each price level of the match event will be provided, i.e., the fields *TrdRegTSTimePriority* and *TrdMatchID* in the execution messages in the T7 EOBI will correspond to the field *TrdRegTSTimePriority* and *FillMatchID* and/or *QuoteEventMatchID* in the T7 ETI (see Appendix A.3 [Connecting T7 EOBI and T7 ETI data](#)).

## 4.4 Modifying an Order

If the time-priority, price and/or displayed quantity of an existing order changes, then an `Order Modify` or `Order Modify Same Priority` message will be sent.

A modification might result in the order being assigned a new priority timestamp (for example, in the case of a price modification). If it is the case, then an `Order Modify` message will be sent. The old priority timestamp will be given by *TrdRegTSPrevTimePriority*, whereas the new priority timestamp will be given by *TrdRegTSTimePriority*. Henceforth the new *TrdRegTSTimePriority* along with the side will be the new unique key for the order in the future.

Please note that change in the priority timestamp might also occur due to change in non-visible order attribute e.g. modification of stop price of an OCO order. In such a case, there will be no change in price and quantity hence *PrevPrice* will contain the original price and *PrevQuantity* will contain the original quantity. Please refer to Deutsche Börse Group Functional Reference documentation for further details.

However, if there is no priority loss with the modification (which may occur for example when quantity is reduced) then the `Order Modify Same Priority` message will be sent and *TrdRegTSTimePriority* field will contain the original order priority-timestamp.

Gateway-In timestamp, *RequestTime (5979)*, of the order will be amended accordingly.

## 4.5 Deleting an Order

When an order is deleted, the T7 EOBI will publish the instrument identifier, the priority timestamp of the order, side, price and transaction time, i.e., the fields *SecurityID*, *TrdRegTSTimePriority*, *Side*, *Price* and *TransactTime*, which will enable participants to quickly identify and delete the corresponding order from the order book. The Gateway-In timestamp of the delete request, *RequestTime (5979)*, will be provided as well. Please note that *RequestTime (5979)* will not be set in case of a self triggered transaction (without any external actor). E.g. an instrument expiry causing an order book clean up.

## 4.6 Order Executions

In order to ease the processing of matches along with the other order book updates by participants the following information is disseminated for each match corresponding to an incoming order:

- first, an execution summary message will be sent when an incoming order has been matched against orders that were already in the order book,

- second, messages that convey the individual executions of visible orders are published<sup>1</sup>.

The `Execution Summary` message contains the instrument identifier, side, aggressor time-stamp, gateway in time-stamp indicated by `RequestTime`, worst price, total executed quantity, resting hidden quantity (if any) and match-time information of the incoming order. Please note that aggressor time-stamp and gateway in time-stamp are provided only for executions triggered by an incoming order.

For conveying the individual executions of the visible orders two template messages will be used for fully and partially executed orders.

The individual order execution messages should be used by participants for order book maintenance to ensure the correctness of the order book. The `Execution Summary` messages can be used by participants for fast trading decisions.

However, it should also be noted that the `Execution Summary` message will **not** be published in the case a match is not triggered by an incoming order. It is illustrated by the following use case.

After an opening auction is committed, all simple instrument order books are published and then the spread order books are uncrossed. A spread order book may cross against a simple order book leading to synthetic matches with full or partial order executions reported on simple instrument order books. The `Execution Summary` message will not be sent in this case, because executions are not triggered by an incoming order. Additionally, the orders on simple instrument order books could be matched at a price which is different from the displayed price. This information is conveyed by fields `Price` and `LastPx` in full or partial order executions messages. `Price` informs the price at which the order was entered into the book, whereas `LastPx` indicates the price at which it was matched.

The order execution messages will be sent whenever a visible order is **fully** or **partially** executed at its displayed price (except for uncrossing scenario described above). Each **match step** will include a **product-wide day-unique identifier** of the trade, represented by the field `TrdMatchID`. This field will always have a value in the execution messages for a full or partial execution. The same unique identifier of the trade is made available to participants by the T7 ETI.

If the incoming order has been partially executed, then the remaining quantity will be reported with an `Order Add` message after all associated individual executions have been provided.

Triggered Stop Market orders or Stop Limit orders are reported like incoming Market or Limit orders, respectively.

---

<sup>1</sup>That implies individual executions are not sent if an incoming order matches against non-visible orders, i.e. if an incoming order matches against a market order or if a synthetic match happens.

## 4.7 Trade Statistics

Instrument trade statistics such as opening, closing, daily low and high prices are available via the T7 EOBI snapshot messages only. They are provided to participants for recovery purposes and are published included in the `Instrument Summary` message on the T7 EOBI snapshot channel. By design, they are provided as a repeating group as part of the `Instrument Summary` message and are not cut off.

When subscribed to the T7 EOBI incremental channel, participants can derive order book and trade statistics by combining the information received via the order and execution messages.

## 4.8 Auctions

The visibility of the order books is limited during an auction. When an instrument goes to an auction state, an `Instrument State Change` message is immediately published via the incremental channel.

Auction information will be published via `Auction Best Bid Offer` and `Auction Clearing Price` messages, which will carry either the Best Bid Offer prices for uncrossed order books or the potential auction price for crossed order books respectively.

An **uncrossed** order book is identified by means of Top-Of-Book prices that are published by `Auction Best-Bid Offer` messages. A **crossed** order book is identified by means of `Auction Clearing Price` messages. So, the change from a crossed to an uncrossed book situation and vice versa is implicitly identified by sending Top-Of-Book information instead of an auction clearing price and vice versa. Both messages, `Auction Best-Bid Offer` and `Auction Clearing Price`, are mutually exclusive.

For derivatives market instruments no other order book information is available during Auctions. Quantities and depth information are not published during auction state.

For cash market instruments depending on the product setup, quantities may be displayed or even the order book might be open during auctions (see *ClosedBookIndicator (28874)* and *MarketImbalanceIndicator (28875)*, T7 RDI). For a crossed book participants might obtain as information about the market situation, the potential auction price with executable volume plus a possible market surplus of the respective order book side (Market Imbalance Information) (see [8.4 Auction Clearing Price](#)).

On the snapshot channels, the auction instrument state is reflected in the `Instrument Summary` message along with the trade statistics. In order to provide an empty book situation in the snapshots, an `Auction Best Bid Offer` message will be present even when the corresponding order book does not contain any Best Bid Offer prices.

When an auction closes, i.e., an instrument leaving an auction, an `Instrument State Change` message is immediately published via T7 EOBI incremental channel. There could also be an optional `Trade Report` message published before the `Instrument State Change`, for the trades those have occurred during the auction phase.

As soon as trading is in the state Continuous Trading, all visible orders in the order book will be published on the T7 Order Book incremental channel in a zig-zag manner. There will be no explicit message clearing any previous sent Top-Of-Book prices or Auction Clearing Price during the auction phase. Product State Change messages and Instrument State Change messages will be used to publish status changes of tradable products and corresponding instruments.

## 4.9 Product and Instrument States

In a Product State Change message, the product state can normally be found in the field *TradingSessionSubID*. Only for quiescent product states, the field *TradingSessionID* must be evaluated additionally to determine the actual product state.

A Halt state is additionally indicated by the field *TradSesStatus* containing the value 1 = Halted.

A Fast Market is reported with the same message type using the field *FastMarketIndicator* which can take the values 0 = No or 1 = Yes.

The instrument state is published with an Instrument State Change message and can be found directly in the field *SecurityTradingStatus*.

*Please note* that a Product State Change message will not be published for IPS products. However, the instrument state for an IPS instrument will be published by Instrument State Change messages. That means, the fields *TradingSessionID* and *TradingSessionSubID* will not be set in the Product Summary message on T7 EOBI snapshot channel.

The status of the instrument (as opposed to the instrument state) distinguishes active, suspended and inactive instruments and is contained in the field *SecurityStatus*.

## 4.10 Intra-day Created Complex Instruments

Add Complex Instrument message will be used to publish complex instruments created intra-day.

A full description of intra-day created complex instruments is available via the T7 RDI and/or the T7 RDF only.

Empty book information for the intra-day created complex instruments is sent for any order maintenance activity.

If a participant's application has a late start and the application uses the "Start-Of-Day" public reference data without applying the intra-day created complex instruments, then order book data may be received for unknown instruments.

## 4.11 T7 Entry Service (TES) Trades

In addition to on-exchange trades T7 EOBI reports ratified disclosed TES trades with TES Trade Report messages. An entry consists of

1. *LastQty* (32) and *LastPx* (31) is filled with quantity and price of the trade,
2. *TrdMatchID* (880) and the *TransactTime* (60).
3. *MultiLegReportingType* (442) is set to 1 = Single Security, 2 = Individual Leg Of A Multi Leg Security or 3 = Multi Leg Security
4. *MultiLegPriceModel* (28750) is set to 0 = Standard or 1 = User defined.
5. *TrdType* (828) is filled with 1 = BlockTrade, 2 = Exchange for Physical (EFP), 12 = Exchange for Swap (EFS), 54 = OTC, 55 = Exchange Basis Facility, 1000 = Vola Trade, 1001 = EFP-Fin Trade, 1002 = EFP-Index-Futures Trade, 1004 = Block Trade at Market, 1006 = Xetra / Eurex Enlight Triggered Trade 1007 = Block QTPIP Trade or 1017 = Delta Trade At Market

When the *TESTradSesStatus* (25044) switches to 5 = PreClose the total *NonDisclosedTradeVolume* (28873) is published. An entry consists of

1. *NonDisclosedTradeVolume* (28873) is filled with the total quantity of the nonDisclosed TES trades.

The trade statistics of TES trades consists of the trading volume and the last price, it does not include daily high and daily low prices. Consequently, only the trading volume and the last price can be recovered.

## 4.12 Manual Trade Entry and Trade Reversal

The T7 EOBI reports all on-exchange trades. In addition to order book trades, participants receive trade messages for trades or trade reversals that are manually entered by T7 Market Supervision.

A manually entered trade will not affect the price statistics. Even if the manually entered trade price is higher than the daily high price, it does not change the daily high price.

In case of a manually entered on-exchange trade by T7 Market Supervision, participants will be informed via a Trade Report message.

A trade can only be reversed by T7 Market Supervision for its full quantity. For such a trade reversal, participants will be informed by a Trade Reversal message. The Trade Reversal message consists of quantity, price, match event identifier and timestamp when the trade reversal request was processed:

- *LastQty* (32) and *LastPx* (31) carry quantity and price of the reversed trade,

- *TrdMatchID (880)* carries the match event identifier of reversed trade,
- *TransactTime (60)* when the trade reversal request was processed.

Please note that a Trade Reversal message will be sent only for trades which have been previously reported on the T7 EOBI incremental channel. Additionally, the message may include other trade statistics such as the new last price, opening price, closing price, low price and high price, in case they are affected. The new trade volume will not be reported with the Trade Reversal message however, the same can be calculated by subtracting the quantity of the reversed trade from the existing trade volume.

### 4.13 Reference Price and (Auction) Price Without Turnover for Cash Markets

The T7 EOBI reports all on-exchange trades. For cash market instruments, participants additionally receive trade messages for reference prices updates and (auction) prices without turnover.

Reference prices are typically sent at start of day. T7 Market Supervision may also update reference prices intraday. Reference prices do not affect price statistics.

Auctions may result in Auction Price Without Turnover (APWT). A Price Without Turnover (PWT) may also be published in Continuous Auction trading model. Any (auction) price without turnover is regarded as regular (auction) price, thus updating last and potentially high and low price. In any case participants will be informed via a Trade Report message consisting of

- *LastPx (31)* is set to reference price or (auction) price without turnover
- *LastQty (32)* is set to 0,
- *TrdMatchID (880)* is not set,
- *TransactTime (60)* when the reference price or auction price without turnover was created.
- *MatchType (574)* is set to *Trade from Auction (7)* for auction price without turnover or *Price Without Turnover in Continuous Auction (14)* and not set for reference price
- *MatchSupType (28610)* is set to *Opening Auction (1)*, *Intraday Auction (3)* or *Closing Auction (2)* for auction price without turnover, not set for reference price

### 4.14 Algorithmic Trade Indicator for Cash Markets

The field *AlgorithmicTradeIndicator (2667)* indicates an Algorithmic Trade, i.e. at least one matching order was submitted by a *trading algorithm* instead of a *human* being. This flag is not used in derivative markets.

An incoming order is matched against two orders of the opposite side of the order book on different price levels.

**Incoming buy order, 3@97.32, DB1 (*human*)**

**Existing Order book (DB1):**

Bid	Ask
	1@97.31 ( <i>human</i> )
	1@97.32 ( <i>human</i> )
	1@97.32 ( <i>trading algorithm</i> )

Three full order executions are reported. All orders executed at the same price level on which an order from a trading algorithm was involved, are reported with *AlgorithmicTradeIndicator (2667)* set to 1 = Algorithmic Trade.

Message	Instr.	MDEntryID	size@prc	Side	AggrSide	AlgoInd.
ExecutionSummary	DB1		3@97.32		Buy	
FullOrderExecution	DB1	10	1@97.31	Sell		
FullOrderExecution	DB1	11	1@97.32	Sell		1
FullOrderExecution	DB1	11	1@97.32	Sell		1

If an order from a trading algorithm is involved in an auction trade, the corresponding TradeReport message for the auction trade will also be reported with *AlgorithmicTradeIndicator (2667)* set to 1 = Algorithmic Trade.

## 4.15 Heartbeats

Functional heartbeat messages, *Heartbeat*, are sent at a regular interval for less active products on the T7 EOBI incremental channels. A functional heartbeat message provides the message sequence number last sent in the field *LastMsgSeqNumProcessed* to allow participants to identify potential gaps. Functional heartbeat messages are only sent for products which have RDI *MarketSegmentStatus (2542)* 1 = Active once T7 EOBI becomes available.

The *technical heartbeat or beacon messages* are transmitted periodically on every multicast address on a specific port assigned for the *technical heartbeat*. The technical heartbeat messages have a variable length payload, which always begins with two magic bytes, 0xC0 0xF8 (FAST Reset). However, the content of the technical heartbeat messages is irrelevant and should be ignored. The messages are sent with the primary purpose to maintain the routing trees, which prevents routers from dropping multicast packages.

During weekends, technical heartbeat messages are sent with a significantly larger payload and higher frequency. This allows participants to detect CRC errors on network connections, for example, after infrastructure maintenance.

## 4.16 Recovery

Due to the unreliable nature of UDP multicast, UDP packets may be duplicated, delayed, missing, or arrive in an incorrect sequence. Therefore, T7 EOBI uses a “Live - Live” concept, as in T7 EMDI, for recovery purposes. Both live services (A and B) are sequenced identically and participants should ideally process both services to detect data losses at an early stage.

If a packet is lost on both (Live - Live) services of the T7 EOBI incremental channel, then participants can take advantage of the **out-of-band** nature of T7 EOBI. Participants can utilize the T7 EOBI snapshot channel to obtain the corresponding lost information, i.e., rebuild the initial order book, determine trade statistics and instrument states. For recovery, participants should recover on a product level (i.e., for all instruments of one product), for two reasons:

- The field *LastMsgSeqNumProcessed* in the snapshot cycle is given on product level, so in order to synchronize the T7 EOBI snapshot channel and the T7 EOBI incremental channel, participants should recover for all instruments in the product.
- Given the fact that there is no explicit information on synthetic price and quantity in the T7 EOBI, participants will have to re-determine the order books of all instruments to derive this information.

### Detecting duplicates and gaps by means of the packet header

The packet header allows receiving applications to identify identical packets between service A and service B. This could be achieved by a simple memory comparison on the first 12 bytes of a T7 EOBI datagram containing the *AppSeqNum* as shown in [8.2 Packet Header](#). *BodyLen* and *TemplateID* will be constant for Packet Header and *MsgSeqNum* is always filled with 0xFFFFFFFF.

*Please note* that packets have contiguous sequence numbers per EOBI channel (service A and service B). This means, that field *AppSeqNum* can be used not only to detect duplicates but also to detect missing packets.

*Please note* that EOBI channels are not shared between different partitions.

### Participant Fail-Over

In the event of a packet loss on both (Live - Live) services of an T7 EOBI channel, recovery on the participant side can be achieved by recovering the order book information via the T7 EOBI snapshot channel.

The T7 EOBI snapshot channel is synchronized with the T7 EOBI incremental channel through the use of message sequence numbering. Participants should subscribe to the T7 Order Book Snapshot channel while buffering incoming messages from the T7 EOBI incremental channel. Any incoming message from the T7 EOBI incremental channel with a *MsgSeqNum* higher than the value of the *LastMsgSeqNumProcessed* field received in the Product Summary snapshot message should be applied to the order books after the full product snapshot is processed.

### Exchange failure

A failure of a T7 EOBI service for a certain *PartitionID* (5948) always leads to a full restart of the respective service and can be detected on an EOBI channel by following characteristics:

- The *AppSeqNum* in the Packet Header is reset to 1.
- The *MsgSeqNum* for each product or *MarketSegment* in the Message Header is reset to 1.

When a participant receives packets on a specific multicast address (either on service A or service



B) with an unexpected (lesser or equal) packet header *AppSeqNum* (usually 1), it is advised, that the participant rebuilds his order books from the new incremental message sequence or subscribes to the T7 EOBI snapshot channel again.

*Please note that*, because of the unreliable nature of the UDP protocol, packets may arrive out of sequence. An application might also see packets with an *AppSeqNum* greater or equal to the previous *AppSeqNum* for a specific fail-over period. Whenever an application detects an unexpected new (lesser or equal) *AppSeqNum* on a specific multicast address with a packet header *TransactTime*  $t_0$  from a *new* sender, all packets from the old sender are expected to have a packet header *TransactTime*  $t < t_0$ .

In certain cases of a full restart of a T7 EOBI service, participants must also wait for the first message after the restart to be certain that a restart was executed.

The field *AppSeqResetIndicator* is always set in the Packet Header of the first few incremental messages after a (re-)start.

*Please note* that in the event of a restart, T7 EOBI for cash markets will publish the last known trade price for each instrument after startup (see [4.13 Reference Price and \(Auction\) Price Without Turnover for Cash Markets](#) on how to detect a reference price). Such a reference price will subsequently also update the *Exchange Last* trade statistics on the associated T7 EOBI instrument snapshot as part of the *Instrument Summary* message.

## 5 Timestamps

The various T7 timestamps mentioned throughout the document, are taken at high-frequency gateways, matching engines and market data servers both in production and simulation. They are also provided through messages sent on T7 EMDI, T7 MDI and T7 EOBI feeds. These can be used to analyze one way transport times. To reiterate, all timestamps are in UTC, and represented as nanoseconds past the UNIX epoch (00:00:00 UTC on 1 January 1970).

An incoming transaction is timestamped at,

Gateway:

- On entry to the Gateway.


Matching Engine:

- order book maintenance and execution,
- creation of direct responses as well as execution messages all for passive orders and quotes,
- creation of listener broadcast for standard orders (see T7 ETI Manual).

Market Data (T7 EMDI, T7 MDI and T7 EOBI):

- *SendingTime* for order book delta and snapshot messages,
- additionally, timestamps from Matching Engine such as *Matching Engine-In* timestamp, *PriorityTimestamp* or *TransactTime* and *Gateway-In* timestamp, etc. are provided on market data messages.

The following picture provides an overview of T7 timestamps:

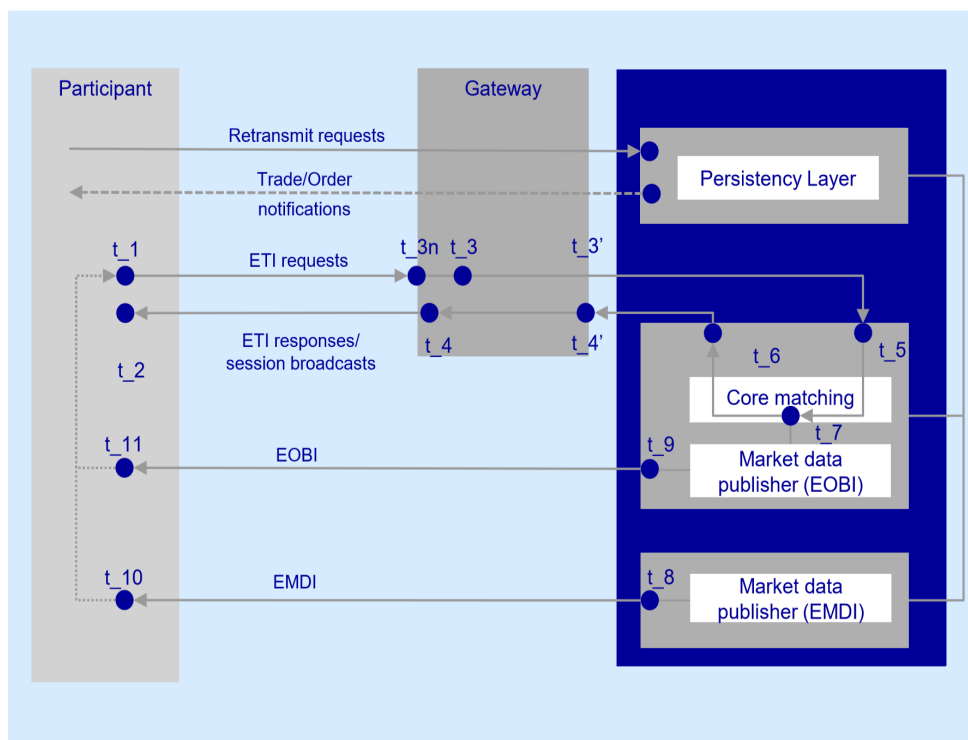

Picture 3 – An overview of T7 Timestamps

The following table lists the mapping of T7 timestamps:

Timestamp	Semantic	FIX fields	Description
t_3n	Gateway request in	<i>If available:</i> RequestTime (5979)	Time taken by the ETI gateway when the first bit of a request arrives on the PS gateway NIC.
t_3	Gateway request in	<i>If t_3n is not available:</i> RequestTime (5979)	Time taken by the ETI gateway application when a request is read from the socket on the Participant's side of the gateway.
t_5	Matching engine in	AggressorTime (2445)	Time taken by the matching engine when a request is read.
t_7	Priority timestamp, Creation timestamp, Transaction timestamp, etc.	TrdRegTSTimePriority (21008), ExecID (17), TransactTime (60), etc.	Time taken when a transaction is functionally processed. It is unique per product. It could be seen in either of the FIX fields depending on if it corresponds to fresh order or quote transaction, strategy creation, execution or as transaction timestamp for others.
t_8	T7 EMDI out	SendingTime (byte vector)	Provides the sending time when T7 EMDI has put the datagram on the wire.
t_9	T7 EOBI out	TransactTime (60)	Provides the sending time when T7 EOBI has put the datagram on the wire.

Table 3 – Mapping of T7 timestamps

## 6 Availability of Enhanced Order Book Service

The T7 EOBI is available during the entire business day between product states “Start-Of-Day” and “Post-End-Of-Day”.

Table 4 below shows the information typically sent on the T7 EOBI during each product state. The messages listed in the table should serve as a super-set of messages and inform participants on “what-to expect” during each product state. However, it does not state any deterministic behaviour and should only be used as a guideline. The actual message set could be a sub-set of the listed messages depending on market conditions.

Product State	Messages
Start-Of-Day	Product State Change, Instrument State Change, Add Complex Instrument, Add Flexible Instrument, Product Summary, Instrument Summary ( <i>incl. Trade Statistics</i> ), Heartbeat
Pre-Trading	Product State Change, Instrument State Change, Order Mass Delete, Add Complex Instrument, Add Flexible Instrument, Product Summary, Instrument Summary ( <i>incl. Trade Statistics</i> ), Trade Report ( <i>manual entered Trades</i> ), Trade Reversal, Heartbeat, Top Of Book ( <i>Continuous Auction only</i> )
Trading	Product State Change, Instrument State Change, Add Complex Instrument, Add Flexible Instrument, Add Order, Modify Order, Modify Order Same Priority, Delete Order, Partial Order Execution, Full Order Execution, Execution Summary, Auction Best Bid Offer ( <i>during Auction</i> ), Auction Clearing Price ( <i>during Auction</i> ), Cross Request, Quote Request, Heartbeat, Product Summary, Instrument Summary ( <i>incl. Trade Statistics</i> ), Snapshot Order, Trade Report ( <i>Manual entered Trades</i> ), Trade Reversal, Top Of Book ( <i>Continuous Auction only</i> )

Closing	Product State Change, Instrument State Change, Auction Best Bid Offer ( <i>during Auction</i> ), Auction Clearing Price ( <i>during Auction</i> ), Top Of Book ( <i>during Trade At Close</i> ), Product Summary, Instrument Summary ( <i>incl. Trade Statistics</i> ), Trade Report ( <i>Manual entered Trades</i> ), Heartbeat, Trade Reversal
Post-Trading	Product State Change, Instrument State Change, Order Mass Delete, Product Summary, Instrument Summary ( <i>incl. Trade Statistics</i> ), Trade Report ( <i>Manual entered Trades</i> ), Top Of Book ( <i>Derivatives only</i> ), Trade Reversal, Heartbeat
End-Of-Day	Product State Change, Instrument State Change, Product Summary, Instrument Summary ( <i>incl. Trade Statistics</i> ), Top Of Book ( <i>Derivatives only</i> ), Heartbeat
Post-End-Of-Day	-
Halt	Product State Change, Instrument State Change, Order Mass Delete, Product Summary, Instrument Summary ( <i>incl. Trade Statistics</i> ),
Holiday	Product State Change, Instrument State Change, Product Summary, Instrument Summary ( <i>incl. Trade Statistics</i> ), Heartbeat

**Table 4 – Availability of Order Book Messages within Different Product States.**

Please note that the T7 EOBI snapshot channels stop after migration of all products to “Post-End-Of-Day”.


## 7 Message Formats

This chapter provides a global overview of the structure of datagram and message layouts and the data types used in these messages.

### 7.1 Datagram Structure

Each UDP datagram<sup>1</sup> starts with a Packet Header followed by one or more public market data messages and is terminated on the product level boundary, meaning that a datagram contains not more than order book updates for one product.

The T7 EOBI follows the following structure for the datagrams sent on the network:

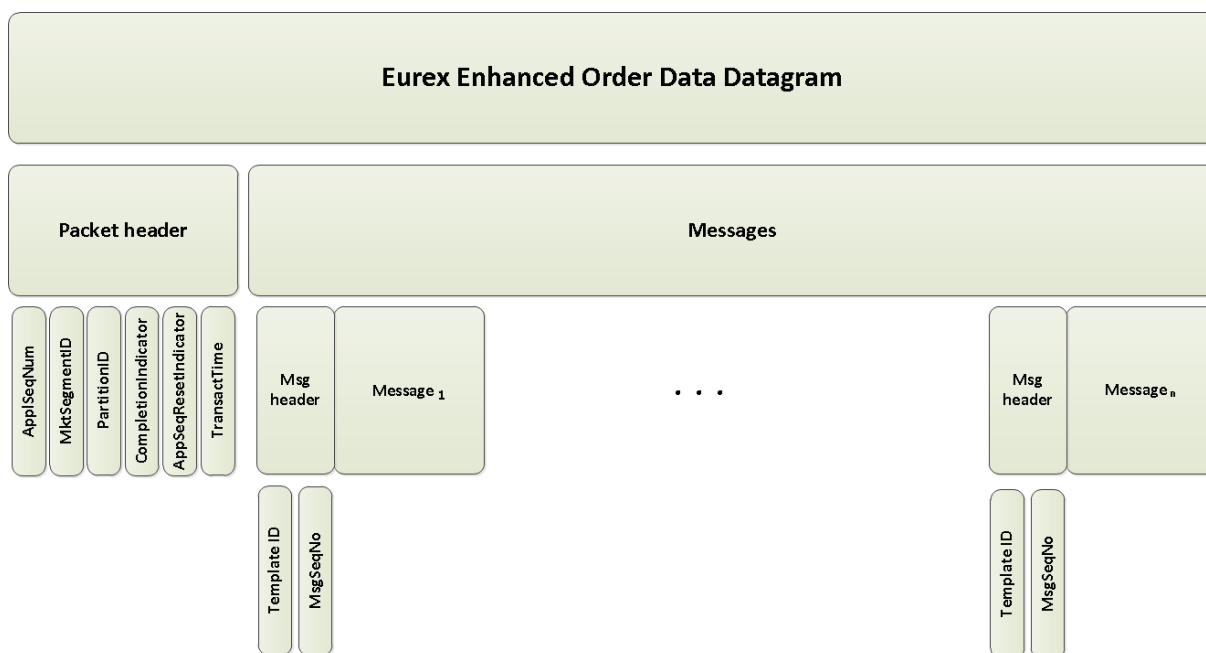

Picture 4 – Generic Datagram structure of T7 EOBI

The Packet Header in each datagram contains information about

- The product and the partition ID of corresponding product,
- A contiguous packet sequence number,
- An indicator whether the **atomic unit of work** fits into one datagram,
- An indicator whether a fail-over has occurred, and
- When the packet has been sent out.


The product, *MarketSegmentID*, information can be used by participants for product filtering purposes.

<sup>1</sup>Shortly called a datagram to ease the readability.

The packet sequence numbers, *AppSeqNum*, are contiguous and are incremented per T7 EOBI channel (service A and service B). They can be used by participants to detect gaps, duplicate and missing packets (see 4.16 Recovery).

Please note that EOBI channels are not shared between different partitions.

Furthermore, the Packet Header provides information whether the atomic unit of work that was processed by the corresponding matching engine fits into one datagram or is spread over several datagrams. By design, a datagram will contain one atomic unit of work that was processed by the corresponding matching engine. However, if the resulting public market data of one atomic unit of work doesn't fit into one datagram due to datagram size restriction, then the resulting market data information is spread over several datagrams. In this case, as it is shown in the picture below, the field *CompletionIndicator* in the first packet header of the first datagram is set to 0 = Incomplete and in the packet header of the last datagram is set to 1 = Complete. As a result, participants are able to gather all market data information belonging together.

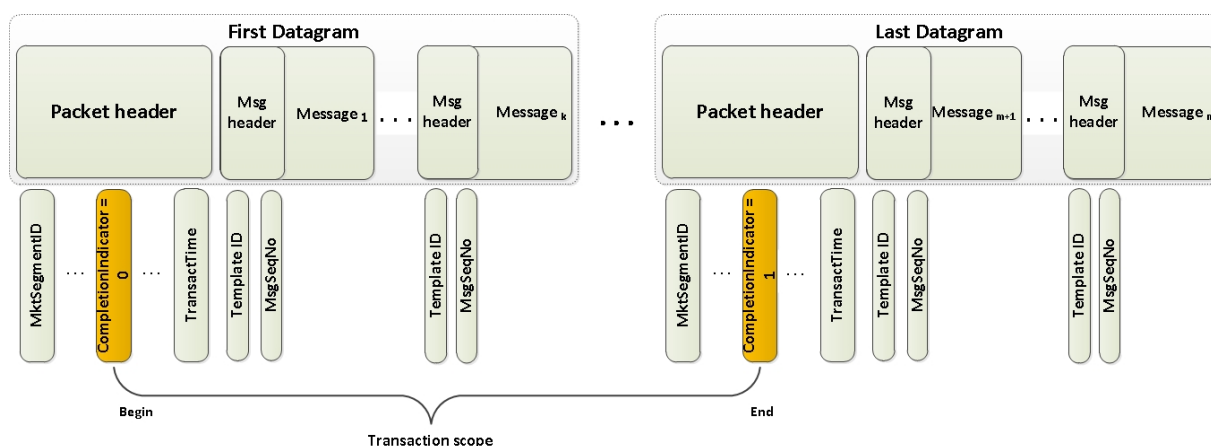

Picture 5 – Transaction scope spread over several datagrams

When the public market data fits into one datagram, the *CompletionIndicator* in the packet header will be set to 1 = Complete.

The time when the datagram is sent out is provided by *TransactTime*.

The functional structure of each T7 EOBI datagram will always be the same. A message header will specify the fixed layout of the message content by a *TemplateID*, followed by a message sequence number of the corresponding product. Message sequence numbers, *MsgSeqNum*, contained in the T7 EOBI incremental messages are incremented per product. Message sequence numbers for the T7 EOBI snapshot messages are incremented per snapshot cycle.

The repeating groups in incremental and snapshot messages are not cut off.

## 7.2 Incremental Messages

Incremental messages are sent according to the T7 EOBI datagram structure as described above.

A message header will indicate the fixed layout of the message content, followed by the actual messages.

There is **no well-defined sending order** for the incremental messages. However, the *template ID* in the message header identifies each incremental message uniquely.

T7 EOBI incremental messages will be sent as long as the T7 EOBI service is available. The Heartbeat messages are repeated in the configured heartbeat interval in a single datagram by setting the message sequence number last sent to the *LastMsgSeqNumProcessed* field of the corresponding product. If the *LastMsgSeqNumProcessed* is not available, i.e., until the product state "Start-Of-Day", then it is set to 0.

As noted, if one atomic unit of work doesn't fit in one datagram, then the resulting market data information is spread over several datagrams. The completion flag will be used for this scenario.

Message	Template ID
Order Add	13100
Order Modify	13101
Order Modify Same Priority	13106
Order Delete	13102
Order Mass Delete	13103
Partial Order Execution	13105
Full Order Execution	13104
Execution Summary	13202
Auction Best Bid Offer	13500
Auction Clearing Price	13501
Top Of Book	13504
Product State Change	13300
Instrument State Change	13301
Cross Request	13502
Quote Request	13503
Add Complex Instrument	13400
Add Flexible Instrument	13401
Trade Report	13201
Trade Reversal	13200
Heartbeat	13001

Table 5 – T7 Enhanced Order Book incremental messages

For order book maintenance, the order messages Order Add, Order Modify, Order Delete and Order Mass Delete will be provided along with the product and instrument state messages. Execution for orders will be published via Partial Order Execution and Full Order



Execution messages for partially and fully matched orders. Additionally, an execution summary, `Execution Summary`, message will be provided for the mass execution scenarios.

Any update to the complex instruments will be provided via complex instrument messages. Auction information will be published as described in [4.8 Auctions](#) in detail.

Manually entered trades and reversed trades by Deutsche Börse Group Market Supervision will be published by using `Trade Report` and `Trade Reversal` messages.

Cross Trade Announcements and Request for Quotes are disseminated by via the `Cross Request` and the `Quote Request` messages. Request for Quotes and Cross Trade Announcements will be published via incremental messages only.

Functional Heartbeats will be published if there is no activity on a specific product.


### 7.3 Snapshot Messages

By design, the snapshot messages are sent periodically and can be used by participants for recovery purposes, i.e. start-up processing or closing gaps in incremental messages. In contrast to T7 EOBI incremental messages, T7 EOBI snapshot messages will provide the trade statistics information at the time of sending. Furthermore, they contain the last message sequence number sent on the incremental feed, to provide a synchronization mechanism to participants for incremental and snapshots messages.

Like incremental messages, the snapshot messages will follow the T7 EOBI datagram structure as described in section [7.1](#) - "Datagram Structure".

T7EOBI snapshot messages will be sent in product states between "Start-Of-Day" and "Post-End-Of-Day".

The picture below provides an overview of a typical **snapshot cycle**.

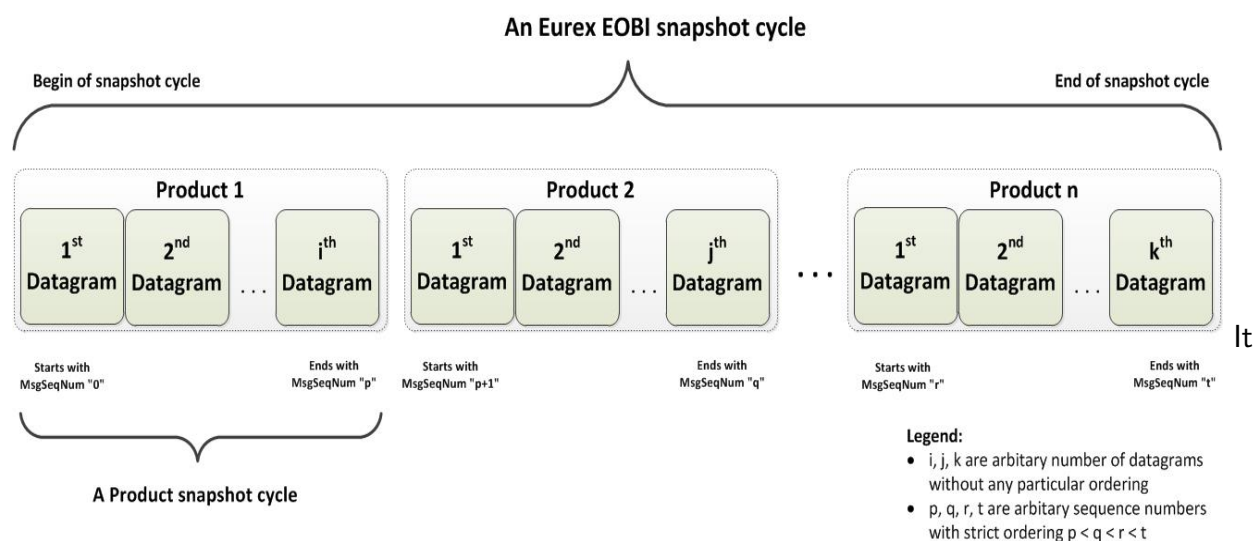


Picture 6 – An overview of a snapshot cycle

is characterized by,

- The packet sequence numbers, *AppSeqNum*, are contiguous and are incremented across products,
- The message sequence number, *MsgSeqNum*, of the first message in the first datagram of a new snapshot cycle is set to 0,
- The message sequence number, *MsgSeqNum*, within the same snapshot cycle is incremented for each message across all messages and all products,
- The *CompletionIndicator* in the last datagram of a product snapshot cycle is set to 1 = Complete to inform about the end of a product snapshot cycle.

That implies, a full snapshot cycle on T7 EOBI snapshot feed comprises of multiple product snapshot cycles. In order to assist an easy identification of a product snapshot boundary, the *CompletionIndicator* is set to 1 = Complete in the last datagram of a product. Each snapshot cycle starts by re-setting the message sequence number, *MsgSeqNum*, to 0 for the first message in the first datagram.s

The following picture further outlines **product snapshot cycle** for the *Product<sub>1</sub>* from the picture above.

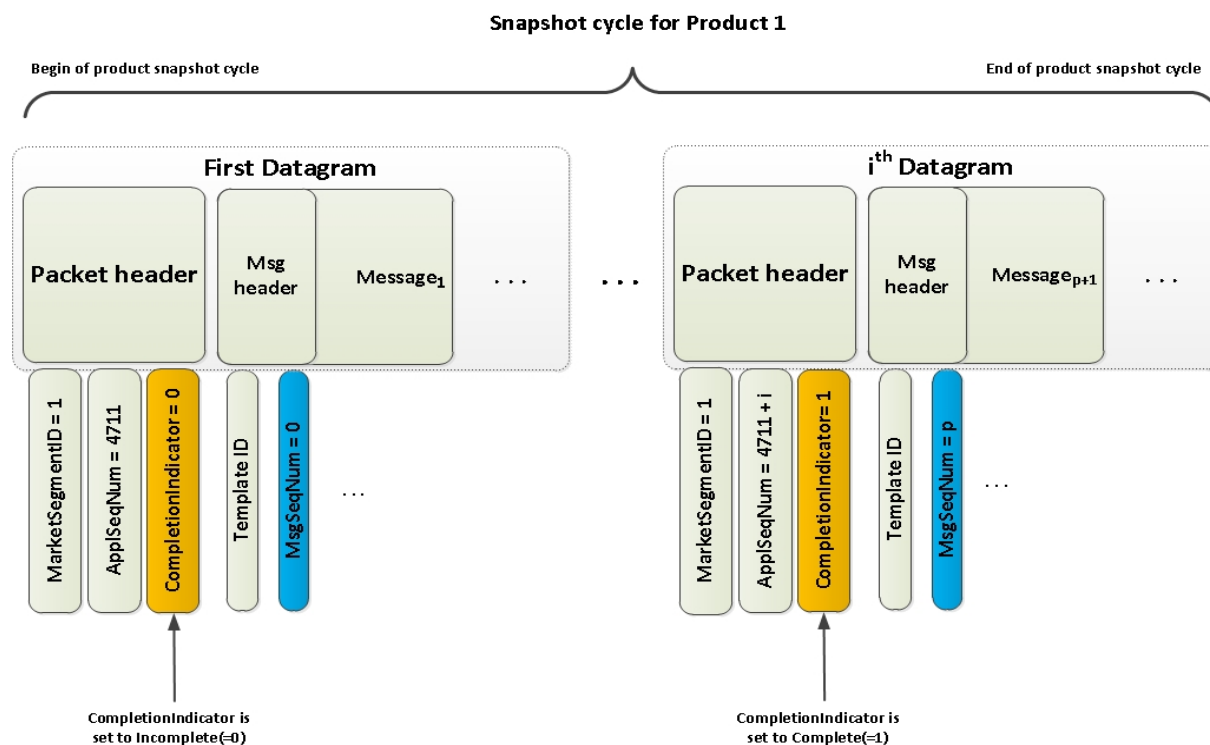

Each message header containing the *TemplateID* of a message within a snapshot cycle will specify the message content.

Two summary messages are introduced to reduce the total size of snapshot messages in a snapshot cycle by avoiding redundant information:

- A **Product Summary** containing the last message sequence number of the last message sent on the incremental feed and trading state information, and
- An **Instrument Summary** for each instrument of the product including instrument state information and trade statistics such as last trade price and volume, daily low and high prices, opening prices etc. Additionally, the number of visible orders in the current product's snapshot cycle is provided to participants in advance.

The last message sequence number, *LastMsgSeqNumProcessed*, in the product summary message denotes the last message sent on the incremental feed, i.e., it provides a link between incremental and snapshot feed.

A snapshot cycle might contain order book information for multiple products. The following describes the snapshot cycle for one product.

A product has multiple instruments. The **Product Summary** will be given once, as it includes attributes that are identical for all instruments. However, it can include multiple **Instrument Summary** messages, each followed by the individual orders for that instrument.

As shown in picture below, a **snapshot cycle of a product** will always start with a product summary followed by an instrument summary followed by all visible orders of the corresponding

instrument and so on. Logically, the whole process is repeated for all instruments of a product.



Picture 8 – A snapshot cycle of a product

Finally, as snapshot cycle of product is terminated on the product level boundary, i.e., *CompletionIndicator* is set to 1 = Complete, the next Product Summary message implicitly defines the start of a snapshot cycle for the next product, inherently defining the product level boundary. All messages within a product level boundary are self-contained.

Order messages within a snapshot cycle will be sent in a zig-zag manner as described in 4.1 Building the Order Book. All subsequent products follow a similar pattern, forming a snapshot cycle.

T7EOBI snapshot messages will contain order book information about the intra-day created complex instruments as well, even if there is no trading activity in that complex instrument.

Please note that during Auctions the snapshot messages may contain either Auction Best Bid – Offer or Auction Clearing Price messages instead of order messages, i.e., if visible orders aren't published during Auctions via snapshot messages.

Additionally, the Top Of Book messages will be published starting from post trading state until end of day trading state to provide participants with last available instrument's BBO information.

## 7.4 Data Types

The following table provides an overview of the data types used in the fixed-length binary encoded messages sent out by T7 EOBI. These data types will be used in 8 Message Layout.

Data Type	Description	No Value
signed int.	little endian byte order supported are 1, 2, 4 and 8-byte, signed integers the most significant bit contains the sign.	1 byte signed int: 0x80 2 byte signed int: 0x8000 4 byte signed int: 0x80000000 8 byte signed int: 0x8000000000000000
unsigned int.	little endian byte order supported are 1, 2, 4 and 8-byte unsigned integer.	1 byte unsigned int: 0xFF 2 byte unsigned int: 0xFFFF 4 byte unsigned int: 0xFFFFFFFF 8 byte unsigned int: 0xFFFFFFFFFFFFFFFF
PriceType	Price in integer format including 8 decimals. For certain asset classes, prices may have negative values.	see 8 byte signed int.
QuantityType	Quantity in integer format including 4 decimals.	see 8 byte signed int.

Counter	Contains a record or message counter.	see 4 byte signed int.
UTCTimestamp	Date and time, in UTC, represented as nanoseconds past the UNIX epoch (00:00:00 UTC on January 1 <sup>st</sup> , 1970).	see 8 byte unsigned int.
Fixed String	Length information specifies the fixed size. Encoded as character array. Completely filled with valid characters (0-terminated, if space for a trailing 0 is available)	0x00 at the first position

**Table 6 – Data types on the T7 EOBI**

## **8 Message Layout**

### **8.1 Overview of Supported Message Types**

The following message formats are based on:

- Interface Version: 13.0
- Build Number: 130.420.3.ga-130005010-101

## General

EOBI Message	FIX Message	MsgType (35)
Packet Header	MarketDataReport	U20
Heartbeat	Heartbeat	0

## Trade Data

EOBI Message	FIX Message	MsgType (35)
Execution Summary	MarketDataTrade	U22
Quote Request	MarketDataInstrument	U23
Cross Request	MarketDataInstrument	U23
Trade Report	MarketDataTrade	U22
Trade Reversal	MarketDataTrade	U22
TES Trade Report	MarketDataTrade	U22

## Order Data

EOBI Message	FIX Message	MsgType (35)
Order Add	MarketDataOrder	U21
Top of Book	MarketDataInstrument	U23
Order Modify	MarketDataOrder	U21
Order Modify Same Priority	MarketDataOrder	U21
Order Delete	MarketDataOrder	U21
Order Mass Delete	MarketDataOrder	U21
Partial Order Execution	MarketDataOrder	U21
Full Order Execution	MarketDataOrder	U21
Auction Best Bid/Offer	MarketDataInstrument	U23
Auction Clearing Price	MarketDataInstrument	U23

## State Change

EOBI Message	FIX Message	MsgType (35)
Product State Change	TradingSessionStatus	h
Mass Instrument State Change	SecurityMassStatus	CO
Instrument State Change	SecurityStatus	f

## Reference Data

EOBI Message	FIX Message	MsgType (35)
Add Complex Instrument	SecurityDefinitionUpdateReport	BP
Add Flexible Instrument	SecurityDefinitionUpdateReport	BP

<b>EOBI Message</b>	<b>FIX Message</b>	<b>MsgType (35)</b>
Add Scaled Simple Instrument	SecurityDefinitionUpdateReport	BP

## Snapshot

<b>EOBI Message</b>	<b>FIX Message</b>	<b>MsgType (35)</b>
Product Summary	MarketDataInstrument	U23
Instrument Summary	MarketDataInstrument	U23
Snapshot Order	MarketDataOrder	U21



## 8.2 General

### Packet Header

The Packet Header is a technical header which is delivered in every UDP-datagram, and is used for identification of datagrams. The Packet Header will be published on a multicast-channel basis, with each packet containing information for one product only, recognizable by the field MarketSegmentID. Whenever there is an amount of information that doesn't fit in one datagram, the field CompletionIndicator will be set to 'Incomplete'. A CompletionIndicator field set to 'Incomplete' implies that another (new) datagram will follow, containing the remaining data. This will be applied to the incremental messages only. Every partition stamps the outgoing datagrams with a sequence number: ApplSeqNum and a sending time: TransactTime. It also includes the ApplSeqResetIndicator field that can be set in case of market data fail-over and/or a market data restart.

The *TemplateID* for the Packet Header will change in future releases and can be used to identify the software release. Up to 5 different Packet Header *TemplateIDs* are reserved for this purpose. It will change only in the event of changes in the interface e.g. a change in the following message layouts.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<i>&lt;MessageHeader&gt;</i>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13004 (Market-DataReport, MsgType = U20)						
34	MsgSeqNum	U	4	4	unsigned int	not used						
<i>&lt;/MessageHeader&gt;</i>												
<i>&lt;MessageBody&gt;</i>												
1181	ApplSeqNum	Y	4	8	unsigned int	Message sequence number is contiguous and is incremented across products.						
1300	MarketSegmentID	Y	4	12	signed int	Product identifier.						
5948	PartitionID	Y	1	16	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability.						
6228	CompletionIndicator	Y	1	17	unsigned int	Indicated whether an unit of works fits into a single datagram for incremental messages. <table border="1" data-bbox="992 1899 1410 2022"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Incomplete</td> </tr> <tr> <td>1</td> <td>Complete</td> </tr> </tbody> </table>	Value	Description	0	Incomplete	1	Complete
Value	Description											
0	Incomplete											
1	Complete											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
28841	ApplSeqResetIndicator	Y	1	18	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No Reset</td> </tr> <tr> <td>1</td> <td>Reset</td> </tr> </tbody> </table>	Value	Description	0	No Reset	1	Reset
Value	Description											
0	No Reset											
1	Reset											
25204	DSCP	N	1	19	unsigned int	Copy of DSCP from IP protocol header (see A.6 Packet classification in the IP protocol header).						
25019	Pad4	U	4	20	Fixed String	not used						
60	TransactTime	Y	8	24	UTCTimestamp	Time when market data feed handler writes packet on the wire.						
<i>&lt;/MessageBody&gt;</i>												

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U20	3	Fixed String	Market Data Report
28827	MDReportEvent	0	1	unsigned int	0 = Scope Definition.

## Heartbeat

A functional Heartbeat message will be published regularly per product when there is no activity on the T7 Enhanced Order Book Interface incremental channel. The functional Heartbeat message will contain the last processed message sequence number, enabling participants to check for missed or lost packets.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<i>&lt;MessageHeader&gt;</i>						
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatelD	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13001 (Heartbeat, MsgType = 0)
34	MsgSeqNum	U	4	4	unsigned int	not used
<i>&lt;/MessageHeader&gt;</i>						
<i>&lt;MessageBody&gt;</i>						
369	LastMsgSeqNum-Processed	Y	4	8	unsigned int	Last Message Sequence number that was processed, regardless of message type.
25019	Pad4	U	4	12	Fixed String	not used
<i>&lt;/MessageBody&gt;</i>						

## Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	0	3	Fixed String	Hearbeat

## 8.3 Trade Data

### Execution Summary

Whenever an incoming order is executed, an *Execution Summary* message will be published, containing information on the execution of the incoming order. The *Execution Summary* message only contains information for the initial instrument (security), that was specified by the incoming order, i.e. any synthetic matches/changes can not be derived from the summary message. The *Execution Summary* message may be used for fast trading decisions. In fact, to be absolutely sure the order book is correct, participants should always process the execution messages following the *Execution Summary* message.

The fields in the *Execution Summary* message provide information on the instrument specified in the incoming order, the time the incoming order entered the gateway and the matching engine, match time, the side of the incoming order, an indicator for a synthetic match, the quantity that was executed (of the specified instrument) in the fill, and the worst price of the fill, represented by the fields *SecurityID*, *RequestTime*, *AggressorTime*, *ExecID*, *AggressorSide*, *TradeCondition*, *LastQty*, *RestingHiddenQty* and *LastPx* respectively.

The *RestingHiddenQty* in the context of an execution (of the specified instrument) would refer to the resting hidden quantity included in the sum of *LastQty* and *RestingCxlQty*. It is set to zero, if no such quantity is involved and is *empty* if the *TradeCondition* is flagged as *ImpliedTrade*.

The *RemainingOrderDetails* are filled with information about a remaining portion of an incoming order that is part of the match event represented by the *ExecutionSummary* message. This is typically added to the order book at the end of a transaction denoted via *CompletionIndicator (6228)*. Please note that in certain orderbook situations, a final *OrderAdd* message on the aggressive side may be reported even if *RemainingOrderDetails* are *empty*.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<i>&lt;MessageHeader&gt;</i>						
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13202 (Market-DataTrade, MsgType = U22)
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.
<i>&lt;/MessageHeader&gt;</i>						
<i>&lt;MessageBody&gt;</i>						
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.
5979	RequestTime	N	8	16	UTCTimestamp	Gateway request in timestamp.
17	ExecID	Y	8	24	UTCTimestamp	Matching timestamp.
32	LastQty	Y	8	32	QuantityType	Total executed matched quantity of this match event.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
2446	AggressorSide	Y	1	40	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Triggered by the buy side</td> </tr> <tr> <td>2</td> <td>Triggered by the sell side</td> </tr> </tbody> </table>	Value	Description	1	Triggered by the buy side	2	Triggered by the sell side
Value	Description											
1	Triggered by the buy side											
2	Triggered by the sell side											
25016	Pad1	U	1	41	Fixed String	not used						
277	TradeCondition	N	2	42	unsigned int	<p>Indicates whether a synthetic match has occurred.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Implied Trade</td> </tr> </tbody> </table>	Value	Description	1	Implied Trade		
Value	Description											
1	Implied Trade											
25230	TradingHHIIndicator	N	1	44	unsigned int	<p>The trading HHI is the index to the HHI interval of the match event. It is calculated based on the traded quantities of each business unit participating on the resting (passive) side in the match event.</p> <p>Please note that in rare occasions it could happen, that the trading HHI stops being sent. In this case, it will be absent for the rest of the trading day.</p>						
25018	Pad3	U	3	45	Fixed String	not used						
31	LastPx	Y	8	48	PriceType	Worst price of this match.						
<RemainingOrderDetails>												
21026	TrdRegTSPrevTimePriority	N	8	56	UTCTimestamp	Previous priority timestamp of the aggressive order. The new priority timestamp of the remaining portion will be equal to <i>ExecID</i>						
1138	DisplayQty	N	8	64	QuantityType	The remaining quantity of the aggressive order that will eventually be added / modified after the match (if applicable), otherwise <i>empty</i> .						
44	Price	N	8	72	PriceType	The limit price of the aggressive order that will eventually be added / modified after the match (if applicable). A disclosed market order will be added with a <i>non-empty DisplayQty</i> and an <i>empty Price</i> .						
</RemainingOrderDetails>												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
28868	RestingHiddenQty	N	8	80	QuantityType	Quantity of executed and/or cancelled passive orders that were not displayed to the market. Set to zero, if no such quantity is involved and to <i>empty</i> if <i>Trade-Condition</i> is flagged as <i>ImpliedTrade</i> .
28869	RestingCxlQty	Y	8	88	QuantityType	Total cancelled (deleted) matched quantity due to Self Match Prevention (SMP) of this match event. This quantity is not part of LastQty which could even be 0 in certain cases.
2445	AggressorTime	N	8	96	UTCTimestamp	Matching Engine-In timestamp.
</MessageBody>						

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U22	3	Fixed String	Market Data Trade
28842	MarketDataType	12	1	unsigned int	Execution Summary (Match Event)
279	MDUpdateAction	0	1	unsigned int	New
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Quote Request

Market participants can enter a quote request (trading interest), asking market makers to enter quotes into a specific instrument. The Quote Request message shows these quote requests.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<i>&lt;MessageHeader&gt;</i>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13503 (MarketDataInstrument, MsgType = U23)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.						
<i>&lt;/MessageHeader&gt;</i>												
<i>&lt;MessageBody&gt;</i>												
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.						
32	LastQty	N	8	16	QuantityType	Defines the requested quantity in a Quote Request.						
54	Side	N	1	24	unsigned int	Side of the order. <table border="1" data-bbox="991 1155 1412 1283"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Buy</td> </tr> <tr> <td>2</td> <td>Sell</td> </tr> </tbody> </table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
25022	Pad7	U	7	25	Fixed String	not used						
60	TransactTime	Y	8	32	UTCTimestamp	Transaction timestamp.						
<i>&lt;/MessageBody&gt;</i>												

## Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U23	3	Fixed String	Market Data Instrument
28842	MarketDataType	8	1	unsigned int	Quote Request
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Cross Request

A crossing is defined as an intentional or unintentional execution of orders and quotes against a preselected participant or in-house. Using the Cross Request message, all participants are informed of a crossing that shall be executed in the T7 order book (on-exchange). For a Cross Announcement other market participants can see the order(s). T7 expects the orders to be entered within a certain time frame or orders are entered by T7 in case the automated crossing functionality is used. For a Liquidity Improvement Cross side, quantity and price are (optionally) visible. Other market participants can enter matching orders.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<i>&lt;MessageHeader&gt;</i>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13502 (MarketDataInstrument, MsgType = U23)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.						
<i>&lt;/MessageHeader&gt;</i>												
<i>&lt;MessageBody&gt;</i>												
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.						
31	LastPx	N	8	16	PriceType	Defines the price of the Liquidity Improvement Cross Request.						
32	LastQty	N	8	24	QuantityType	Defines the requested quantity of a Cross Request.						
54	Side	N	1	32	unsigned int	Defines the requested client side of a Cross Request. <table border="1" data-bbox="991 1473 1410 1603"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Buy</td> </tr> <tr> <td>2</td> <td>Sell</td> </tr> </tbody> </table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
28771	CrossRequestType	Y	1	33	unsigned int	<table border="1" data-bbox="991 1677 1410 1807"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Cross Announcement</td> </tr> <tr> <td>2</td> <td>Liquidity Improvement Cross</td> </tr> </tbody> </table>	Value	Description	1	Cross Announcement	2	Liquidity Improvement Cross
Value	Description											
1	Cross Announcement											
2	Liquidity Improvement Cross											
979	InputSource	N	1	34	unsigned int	<table border="1" data-bbox="991 1881 1410 1966"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>CLIPClient Broker</td> </tr> </tbody> </table>	Value	Description	1	CLIPClient Broker		
Value	Description											
1	CLIPClient Broker											
25020	Pad5	U	5	35	Fixed String	not used						
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
<i>&lt;/MessageBody&gt;</i>												



### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U23	3	Fixed String	Market Data Instrument
28842	MarketDataType	7	1	unsigned int	Cross Request / Trade Announcement
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Trade Report

Whenever e.g. a trade results from an auction, a xetra retail match or from a trade entered manually by Market Supervision, participants will be informed by a Trade Report message. The reason for the trade will be indicated by the combination of fields *MatchType* (574), *MatchSubType* (28610) or *TradeCondition* (277).

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeader>						
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13201 (Market-DataTrade, MsgType = U22)
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.
</MessageHeader>						
<MessageBody>						
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.
60	TransactTime	Y	8	16	UTCTimestamp	Transaction timestamp.
32	LastQty	Y	8	24	QuantityType	Quantity executed in this fill.
31	LastPx	Y	8	32	PriceType	Price of this fill.
880	TrdMatchID	N	4	40	unsigned int	Unique identifier for each price level (match step) of a match event; it is used for public trade reporting. Not set for reference price.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
574	MatchType	N	1	44	unsigned int	<p><b>5 = Trade from Uncrossing</b> Only applicable for derivatives markets.</p> <p><b>7 = Trade from Auction</b> Is set for auction trades, for Auction Price Without Turnover (APWT) in cash markets and for trades in Continuous Auction trading model.</p> <p><b>14 = Price Without Turnover in Continuous Auction</b> Only applicable for cash markets.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>Manual Trade Entry</td> </tr> <tr> <td>5</td> <td>Trade from Uncrossing</td> </tr> <tr> <td>7</td> <td>Trade from Auction</td> </tr> <tr> <td>13</td> <td>Trade from Liquidity Improvement Cross</td> </tr> <tr> <td>14</td> <td>Price Without Turnover in Continuous Auction</td> </tr> </tbody> </table>	Value	Description	3	Manual Trade Entry	5	Trade from Uncrossing	7	Trade from Auction	13	Trade from Liquidity Improvement Cross	14	Price Without Turnover in Continuous Auction
Value	Description																	
3	Manual Trade Entry																	
5	Trade from Uncrossing																	
7	Trade from Auction																	
13	Trade from Liquidity Improvement Cross																	
14	Price Without Turnover in Continuous Auction																	
28610	MatchSubType	N	1	45	unsigned int	<p>Indicates the auction type the trade originates from. Not filled for uncrossing, i.e. when a complex instrument switches to the instrument state "Continuous".</p> <p><b>5 = IPOAuction</b> Used for cash market instruments only.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Opening Auction</td> </tr> <tr> <td>2</td> <td>Closing Auction</td> </tr> <tr> <td>3</td> <td>Intraday Auction</td> </tr> <tr> <td>4</td> <td>Circuit Breaker Auction</td> </tr> <tr> <td>5</td> <td>IPOAuction</td> </tr> </tbody> </table>	Value	Description	1	Opening Auction	2	Closing Auction	3	Intraday Auction	4	Circuit Breaker Auction	5	IPOAuction
Value	Description																	
1	Opening Auction																	
2	Closing Auction																	
3	Intraday Auction																	
4	Circuit Breaker Auction																	
5	IPOAuction																	
2667	AlgorithmicTradeIndicator	N	1	46	unsigned int	<p>A trade is flagged as <i>algorithmic</i>, if at least one of the matched orders was submitted by a trading algorithm. Applicable for cash market instruments only.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Algorithmic Trade</td> </tr> </tbody> </table>	Value	Description	1	Algorithmic Trade								
Value	Description																	
1	Algorithmic Trade																	
25016	Pad1	U	1	47	Fixed String	not used												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
277	TradeCondition	N	2	48	unsigned int	<p><b>107 = Out of sequence (k)</b> only applicable for <i>MatchType (574)</i> 3 = Manual Trade Entry and 13 = Trade from Liquidity Improvement Cross.</p> <p><b>156 = Trading On Terms Of Issue (BC)</b> applicable for cash market products only.</p> <p><b>596 = Special Auction (SA)</b> Indicates a Special Auction Price and is only applicable for trading model Continuous Auction Specialist. For federal bonds the Special Auction indicator is used for prices determined with Bundesbank participation.</p> <p><b>743 = Retail (XR)</b> price. Applicable for cash market products only.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>107</td> <td>Out of sequence (k)</td> </tr> <tr> <td>156</td> <td>Trading On Terms Of Issue (BC)</td> </tr> <tr> <td>596</td> <td>Special Auction (SA)</td> </tr> <tr> <td>624</td> <td>Trade At Close (TC)</td> </tr> <tr> <td>743</td> <td>Retail (XR)</td> </tr> <tr> <td>155</td> <td>Midpoint Price (BB)</td> </tr> </tbody> </table>	Value	Description	107	Out of sequence (k)	156	Trading On Terms Of Issue (BC)	596	Special Auction (SA)	624	Trade At Close (TC)	743	Retail (XR)	155	Midpoint Price (BB)
Value	Description																			
107	Out of sequence (k)																			
156	Trading On Terms Of Issue (BC)																			
596	Special Auction (SA)																			
624	Trade At Close (TC)																			
743	Retail (XR)																			
155	Midpoint Price (BB)																			
25021	Pad6	U	6	50	Fixed String	not used														
</MessageBody>																				

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U22	3	Fixed String	Market Data Trade
28842	MarketDataType	4	1	unsigned int	Trade Report
279	MDUpdateAction	0	1	unsigned int	New
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Trade Reversal

Whenever a trade is reversed by Market Supervision, participants will be informed by a Trade Reversal message.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
<i>&lt;MessageHeader&gt;</i>														
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.								
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13200 (Market-DataTrade, MsgType = U22)								
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.								
<i>&lt;/MessageHeader&gt;</i>														
<i>&lt;MessageBody&gt;</i>														
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.								
60	TransactTime	Y	8	16	UTCTimestamp	Transaction timestamp.								
32	LastQty	Y	8	24	QuantityType	Quantity executed in this fill.								
31	LastPx	Y	8	32	PriceType	Price of this fill.								
21001	TrdRegTSExecution-Time	N	8	40	UTCTimestamp	Matching timestamp of new last trade.								
880	TrdMatchID	Y	4	48	unsigned int	Unique identifier for each price level (match step) of a match event; it is used for public trade reporting.								
277	TradeCondition	N	2	52	unsigned int	<p><b>743 = Retail (XR)</b> price, if a Xetra retail trade has been reversed.</p> <p>In both cases the MDTradeEntryGrp will convey changed statistic values which are only valid within the specific context.</p> <p>Applicable for cash market instruments only.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>624</td> <td>Trade At Close (TC)</td> </tr> <tr> <td>743</td> <td>Retail (XR)</td> </tr> <tr> <td>155</td> <td>Midpoint Price (BB)</td> </tr> </tbody> </table>	Value	Description	624	Trade At Close (TC)	743	Retail (XR)	155	Midpoint Price (BB)
Value	Description													
624	Trade At Close (TC)													
743	Retail (XR)													
155	Midpoint Price (BB)													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
1024	MDOriginType	N	1	54	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Book</td> </tr> <tr> <td>1</td> <td>Off Book</td> </tr> </tbody> </table>	Value	Description	0	Book	1	Off Book						
Value	Description																	
0	Book																	
1	Off Book																	
268	NoMDEntries	Y	1	55	Counter													
<i>&lt;MDTradeEntryGrp&gt; Variable size array, Record counter: NoMDEntries</i>																		
270	>MDEntryPx	N	8	56	PriceType	Price.												
271	>MDEntrySize	N	8	64	QuantityType	Quantity.												
269	>MDEntryType	Y	1	72	unsigned int	Type of market data entry. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>Trade</td> </tr> <tr> <td>4</td> <td>Opening Price</td> </tr> <tr> <td>5</td> <td>Closing Price</td> </tr> <tr> <td>7</td> <td>High Price</td> </tr> <tr> <td>8</td> <td>Low Price</td> </tr> </tbody> </table>	Value	Description	2	Trade	4	Opening Price	5	Closing Price	7	High Price	8	Low Price
Value	Description																	
2	Trade																	
4	Opening Price																	
5	Closing Price																	
7	High Price																	
8	Low Price																	
25022	>Pad7	U	7	73	Fixed String	not used												
<i>&lt;/MDTradeEntryGrp&gt;</i>																		
<i>&lt;/MessageBody&gt;</i>																		

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U22	3	Fixed String	Market Data Trade
28842	MarketDataType	3	1	unsigned int	Trade Reversal
279	MDUpdateAction	2	1	unsigned int	Delete
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## TES Trade Report

The Trade Entry Service (TES) Trade Report message provides incremental Off-Book trade and volume information.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																								
<i>&lt;MessageHeader&gt;</i>																														
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.																								
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13203 (Market-DataTrade, MsgType = U22)																								
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.																								
<i>&lt;/MessageHeader&gt;</i>																														
<i>&lt;MessageBody&gt;</i>																														
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.																								
60	TransactTime	Y	8	16	UTCTimestamp	Transaction timestamp.																								
32	LastQty	N	8	24	QuantityType	Quantity executed in this fill.																								
31	LastPx	N	8	32	PriceType	Price of this fill.																								
880	TrdMatchID	N	4	40	unsigned int	Unique identifier for each price level (match step) of a match event; it is used for public trade reporting.																								
828	TrdType	N	2	44	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Block Trade</td> </tr> <tr> <td>2</td> <td>Exchange For Physical</td> </tr> <tr> <td>54</td> <td>OTC</td> </tr> <tr> <td>55</td> <td>ExchangeBasisFacility</td> </tr> <tr> <td>1000</td> <td>Vola Trade</td> </tr> <tr> <td>1001</td> <td>EFP-Fin Trade</td> </tr> <tr> <td>1002</td> <td>EFP-Index-Futures Trade</td> </tr> <tr> <td>1004</td> <td>Block Trade At Market</td> </tr> <tr> <td>1006</td> <td>Xetra / Eurex Enlight Triggered Trade</td> </tr> <tr> <td>1007</td> <td>Block QTPIP Trade</td> </tr> <tr> <td>1017</td> <td>Delta Trade At Market</td> </tr> </tbody> </table>	Value	Description	1	Block Trade	2	Exchange For Physical	54	OTC	55	ExchangeBasisFacility	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index-Futures Trade	1004	Block Trade At Market	1006	Xetra / Eurex Enlight Triggered Trade	1007	Block QTPIP Trade	1017	Delta Trade At Market
Value	Description																													
1	Block Trade																													
2	Exchange For Physical																													
54	OTC																													
55	ExchangeBasisFacility																													
1000	Vola Trade																													
1001	EFP-Fin Trade																													
1002	EFP-Index-Futures Trade																													
1004	Block Trade At Market																													
1006	Xetra / Eurex Enlight Triggered Trade																													
1007	Block QTPIP Trade																													
1017	Delta Trade At Market																													
277	TradeCondition	N	2	46	unsigned int	Set for trades which are part of a basket trade. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>107</td> <td>Out of sequence (k)</td> </tr> </tbody> </table>	Value	Description	107	Out of sequence (k)																				
Value	Description																													
107	Out of sequence (k)																													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
442	MultiLegReporting- Type	N	1	48	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Single Security</td> </tr> <tr> <td>2</td> <td>Individual Leg Of A Multi Leg Security</td> </tr> </tbody> </table>	Value	Description	1	Single Security	2	Individual Leg Of A Multi Leg Security
Value	Description											
1	Single Security											
2	Individual Leg Of A Multi Leg Security											
28450	MultiLegPriceModel	N	1	49	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Standard</td> </tr> <tr> <td>1</td> <td>User Defined</td> </tr> </tbody> </table>	Value	Description	0	Standard	1	User Defined
Value	Description											
0	Standard											
1	User Defined											
25021	Pad6	U	6	50	Fixed String	not used						
28873	NonDisclosedTrade- Volume	N	8	56	QuantityType	Only valid during <i>TESTradSesStatus</i> (25044) 5 = Pre Close.						
483	TransBkdTime	N	8	64	UTCTimestamp	Indicating the time when the original trade was made in an external broker system.						
28911	NumberOfBuySides	N	2	72	unsigned int	Indicating the number of buy sides for TES trades.						
28912	NumberOfSellSides	N	2	74	unsigned int	Indicating the number of sell sides for TES trades.						
25019	Pad4	U	4	76	Fixed String	not used						
</MessageBody>												

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U22	3	Fixed String	Market Data Trade
28842	MarketDataType	15	1	unsigned int	TES Trade Report
279	MDUpdateAction	0	1	unsigned int	New
22	SecurityIDSsource	M	1	Fixed String	Marketplace assigned identifier.



## 8.4 Order Data

### Order Add

An Order Add message will be published for each new order that was entered in the order book. The unique key for each order will be based on the instrument identifier, the priority timestamp and the order side, represented by the fields SecurityID, TrdRegTSTimePriority and Side respectively.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<i>&lt;MessageHeader&gt;</i>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13100 (MarketDataOrder, MsgType = U21)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.						
<i>&lt;/MessageHeader&gt;</i>												
<i>&lt;MessageBody&gt;</i>												
5979	RequestTime	N	8	8	UTCTimestamp	Gateway request in timestamp.						
48	SecurityID	Y	8	16	signed int	Unique instrument identifier.						
<i>&lt;OrderDetails&gt;</i>												
21008	TrdRegTSTime-Priority	Y	8	24	UTCTimestamp	Priority timestamp.						
1138	DisplayQty	Y	8	32	QuantityType	Quantity.						
54	Side	Y	1	40	unsigned int	Side of the order. <table border="1" data-bbox="991 1422 1412 1552"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Buy</td> </tr> <tr> <td>2</td> <td>Sell</td> </tr> </tbody> </table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
40	OrdType	N	1	41	unsigned int	Used for cash market instruments only. <b>1 = Market Order</b> Used for cash market instruments only. <table border="1" data-bbox="991 1751 1412 1836"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Market Order</td> </tr> </tbody> </table>	Value	Description	1	Market Order		
Value	Description											
1	Market Order											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25228	HHIIndicator	N	1	42	signed int	<p>The updated index of the HHI interval at the orders' price level, if the product is HHI enabled.</p> <p>Please note that in rare occasions the HHI might not get updated anymore and will be absent for the rest of the trading day.</p> <p><b>-1 = No Update</b> no change to the previous value sent for the same price level.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>-1</td> <td>No Update</td> </tr> <tr> <td>*</td> <td>More values</td> </tr> </tbody> </table>	Value	Description	-1	No Update	*	More values
Value	Description											
-1	No Update											
*	More values											
25020	Pad5	U	5	43	Fixed String	not used						
44	Price	N	8	48	PriceType	Price.						
</OrderDetails>												
</MessageBody>												

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U21	3	Fixed String	Market Data Order
28842	MarketDataType	1	1	unsigned int	Order Add (Order Book Maintenance)
279	MDUpdateAction	0	1	unsigned int	New
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Top of Book

For derivatives market the Top of Book messages will be published via incremental and snapshot messages starting from post trading state until end of day trading state to provide the BBO instrument's information. For cash markets the Top of Book messages will be published via incremental and snapshot messages for instrument state Trade at Close. For more details see [6 Availability of Enhanced Order Book Service](#).

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<i>&lt;MessageHeader&gt;</i>						
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13504 (MarketDataInstrument, MsgType = U23)
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.
<i>&lt;/MessageHeader&gt;</i>						
<i>&lt;MessageBody&gt;</i>						
60	TransactTime	Y	8	8	UTCTimestamp	Transaction timestamp.
48	SecurityID	Y	8	16	signed int	Unique instrument identifier.
132	BidPx	N	8	24	PriceType	Bid price/rate.
133	OfferPx	N	8	32	PriceType	Offer price/rate.
134	BidSize	N	8	40	QuantityType	Quantity of bid.
135	OfferSize	N	8	48	QuantityType	Quantity of offer.
2449	NumberOfBuyOrders	N	2	56	unsigned int	Number of bid orders. Only set, if instrument is in SecurityTradingStatus(326) 217 = Trade At Close.
2450	NumberOfSellOrders	N	2	58	unsigned int	Number of offer orders. Only set, if instrument is in SecurityTradingStatus(326) 217 = Trade At Close.
25019	Pad4	U	4	60	Fixed String	not used
<i>&lt;/MessageBody&gt;</i>						

## Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U23	3	Fixed String	Market Data Instrument
28842	MarketDataType	13	1	unsigned int	Top Of Book
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Order Modify

An Order Modify message will be published, if an existing order in the book is modified, whereby the new parameters of the order might cause a change in time priority. If an order is modified to another price, or if the quantity of this order is increased, the time priority of the order will change. The order that was modified is recognizable by the field TrdRegTSPrevTimePriority and a new priority key will be set by using the TrdRegTSTimePriority field. Please note that the time priority might also change in case any no-visible attribute of an order is changed e.g. stop price of an OCO order.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<i>&lt;MessageHeader&gt;</i>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13101 (Market-DataOrder, MsgType = U21)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.						
<i>&lt;/MessageHeader&gt;</i>												
<i>&lt;MessageBody&gt;</i>												
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.						
21026	TrdRegTSPrevTimePriority	Y	8	16	UTCTimestamp	Previous order priority timestamp.						
28855	PrevPrice	N	8	24	PriceType	Previous order price.						
28867	PrevDisplayQty	Y	8	32	QuantityType	Previous display quantity						
48	SecurityID	Y	8	40	signed int	Unique instrument identifier.						
<i>&lt;OrderDetails&gt;</i>												
21008	TrdRegTSTimePriority	Y	8	48	UTCTimestamp	Priority timestamp (new)						
1138	DisplayQty	Y	8	56	QuantityType	Quantity.						
54	Side	Y	1	64	unsigned int	Side of the order. <table border="1" data-bbox="991 1630 1409 1760"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Buy</td> </tr> <tr> <td>2</td> <td>Sell</td> </tr> </tbody> </table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
40	OrdType	N	1	65	unsigned int	Used for cash market instruments only. <b>1 = Market Order</b> Used for cash market instruments only. <table border="1" data-bbox="991 1960 1409 2045"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Market Order</td> </tr> </tbody> </table>	Value	Description	1	Market Order		
Value	Description											
1	Market Order											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25228	HHIIndicator	N	1	66	signed int	<p>The updated index of the HHI interval at the orders' (new) price level, if the product is HHI enabled.</p> <p>Please note that in rare occasions the HHI might not get updated anymore and will be absent for the rest of the trading day.</p> <p><b>-1 = No Update</b> no change to the previous value sent for the same price level.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>-1</td> <td>No Update</td> </tr> <tr> <td>*</td> <td>More values</td> </tr> </tbody> </table>	Value	Description	-1	No Update	*	More values
Value	Description											
-1	No Update											
*	More values											
25020	Pad5	U	5	67	Fixed String	not used						
44	Price	N	8	72	PriceType	Price.						
<i>&lt;/OrderDetails&gt;</i>												
25231	PrevPriceHHIIndicator	N	1	80	signed int	<p>The updated index of the HHI interval at the orders' previous price level, if the product is HHI enabled and the previous price level still exists, otherwise no value.</p> <p>Please note that in rare occasions the HHI might not get updated anymore and will be absent for the rest of the trading day.</p> <p><b>-1 = No Update</b> no change to the previous value sent for the same price level.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>-1</td> <td>No Update</td> </tr> </tbody> </table>	Value	Description	-1	No Update		
Value	Description											
-1	No Update											
25022	Pad7	U	7	81	Fixed String	not used						
<i>&lt;/MessageBody&gt;</i>												

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U21	3	Fixed String	Market Data Order

Tag	Field Name	Field Value	Length	Data Type	Description
28842	MarketDataType	1	1	unsigned int	Order Modify (Order Book Maintenance)
279	MDUpdateAction	1	1	unsigned int	Change
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Order Modify Same Priority

An Order Modify Same Priority message will be published, if the time priority of an existing order is not changed. The time priority of the order is available in the TrdRegTSTimePriority field.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<i>&lt;MessageHeader&gt;</i>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13106 (MarketDataOrder, MsgType = U21)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.						
<i>&lt;/MessageHeader&gt;</i>												
<i>&lt;MessageBody&gt;</i>												
5979	RequestTime	N	8	8	UTCTimestamp	Gateway request in timestamp.						
60	TransactTime	Y	8	16	UTCTimestamp	Transaction timestamp.						
28867	PrevDisplayQty	Y	8	24	QuantityType	Previous display quantity						
48	SecurityID	Y	8	32	signed int	Unique instrument identifier.						
<i>&lt;OrderDetails&gt;</i>												
21008	TrdRegTSTimePriority	Y	8	40	UTCTimestamp	Priority timestamp. Identical to the original time priority.						
1138	DisplayQty	Y	8	48	QuantityType	Quantity.						
54	Side	Y	1	56	unsigned int	Side of the order. <table border="1" data-bbox="991 1391 1412 1518"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Buy</td> </tr> <tr> <td>2</td> <td>Sell</td> </tr> </tbody> </table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
40	OrdType	N	1	57	unsigned int	Used for cash market instruments only. <b>1 = Market Order</b> Used for cash market instruments only. <table border="1" data-bbox="991 1720 1412 1805"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Market Order</td> </tr> </tbody> </table>	Value	Description	1	Market Order		
Value	Description											
1	Market Order											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25228	HHIIndicator	N	1	58	signed int	<p>The updated index of the HHI interval at the orders' price level, if the product is HHI enabled.</p> <p>Please note that in rare occasions the HHI might not get updated anymore and will be absent for the rest of the trading day.</p> <p><b>-1 = No Update</b> no change to the previous value sent for the same price level.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>-1</td> <td>No Update</td> </tr> <tr> <td>*</td> <td>More values</td> </tr> </tbody> </table>	Value	Description	-1	No Update	*	More values
Value	Description											
-1	No Update											
*	More values											
25020	Pad5	U	5	59	Fixed String	not used						
44	Price	N	8	64	PriceType	Price.						
</OrderDetails>												
</MessageBody>												

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U21	3	Fixed String	Market Data Order
28842	MarketDataType	1	1	unsigned int	Order Modify Same Prio(-rity) (Order Book Maintenance)
279	MDUpdateAction	1	1	unsigned int	Change
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.



## Order Delete

Whenever an existing order is deleted from the order book, an Order Delete message will be published. The Order Delete message will contain all necessary fields needed to delete the correct order; SecurityID, TrdRegTSTimePriority, Side. For convenience, the order delete message will also contain the former displayed quantity and the former price.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<i>&lt;MessageHeader&gt;</i>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13102 (MarketDataOrder, MsgType = U21)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.						
<i>&lt;/MessageHeader&gt;</i>												
<i>&lt;MessageBody&gt;</i>												
5979	RequestTime	N	8	8	UTCTimestamp	Gateway request in timestamp.						
60	TransactTime	Y	8	16	UTCTimestamp	Transaction timestamp.						
48	SecurityID	Y	8	24	signed int	Unique instrument identifier.						
<i>&lt;OrderDetails&gt;</i>												
21008	TrdRegTSTimePriority	Y	8	32	UTCTimestamp	Priority timestamp.						
1138	DisplayQty	Y	8	40	QuantityType	Quantity.						
54	Side	Y	1	48	unsigned int	Side of the order. <table border="1" data-bbox="991 1395 1409 1525"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Buy</td> </tr> <tr> <td>2</td> <td>Sell</td> </tr> </tbody> </table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
40	OrdType	N	1	49	unsigned int	Used for cash market instruments only. <b>1 = Market Order</b> Used for cash market instruments only. <table border="1" data-bbox="991 1727 1409 1809"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Market Order</td> </tr> </tbody> </table>	Value	Description	1	Market Order		
Value	Description											
1	Market Order											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25228	HHIIndicator	N	1	50	signed int	<p>The updated index of the HHI interval, if the product is HHI enabled and the orders' price level still exists, otherwise no value.</p> <p>Please note that in rare occasions the HHI might not get updated anymore and will be absent for the rest of the trading day.</p> <p><b>-1 = No Update</b> no change to the previous value sent for the same price level.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>-1</td> <td>No Update</td> </tr> <tr> <td>*</td> <td>More values</td> </tr> </tbody> </table>	Value	Description	-1	No Update	*	More values
Value	Description											
-1	No Update											
*	More values											
25020	Pad5	U	5	51	Fixed String	not used						
44	Price	N	8	56	PriceType	Price.						
</OrderDetails>												
</MessageBody>												

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U21	3	Fixed String	Market Data Order
28842	MarketDataType	1	1	unsigned int	Order Delete (Order Book Maintenance)
279	MDUpdateAction	2	1	unsigned int	Delete
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Order Mass Delete

An Order Mass Delete message will be published when the order book is expected to be emptied. The message contains the instrument identifier indicating which order book has to be fully deleted.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<i>&lt;MessageHeader&gt;</i>						
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13103 (Market-DataOrder, MsgType = U21)
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.
<i>&lt;/MessageHeader&gt;</i>						
<i>&lt;MessageBody&gt;</i>						
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.
60	TransactTime	Y	8	16	UTCTimestamp	Transaction timestamp.
<i>&lt;/MessageBody&gt;</i>						

## Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U21	3	Fixed String	Market Data Order
28842	MarketDataType	1	1	unsigned int	Order Mass Delete (Order Book Maintenance)
279	MDUpdateAction	2	1	unsigned int	Delete
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Partial Order Execution

Whenever a visible order is partially executed at its displayed price, a Partial Order Execution message will be published, containing the execution information; instrument identifier, priority timestamp, price and executed quantity of the executed passive order as well as the match identifier. The remaining quantity in the order book for this order must be calculated by subtracting the executed quantity in the Partial Order Execution message from the initial quantity in the order book.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<i>&lt;MessageHeader&gt;</i>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13105 (Market-DataOrder, MsgType = U21)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.						
<i>&lt;/MessageHeader&gt;</i>												
<i>&lt;MessageBody&gt;</i>												
54	Side	Y	1	8	unsigned int	Side of the order. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Buy</td> </tr> <tr> <td>2</td> <td>Sell</td> </tr> </tbody> </table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
40	OrdType	N	1	9	unsigned int	Used for cash market instruments only. <b>1 = Market Order</b> Used for cash market instruments only. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Market Order</td> </tr> </tbody> </table>	Value	Description	1	Market Order		
Value	Description											
1	Market Order											
2667	AlgorithmicTrade-Indicator	N	1	10	unsigned int	A trade is flagged as <i>algorithmic</i> , if at least one of the matched orders was submitted by a trading algorithm. Applicable for cash market instruments only. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Algorithmic Trade</td> </tr> </tbody> </table>	Value	Description	1	Algorithmic Trade		
Value	Description											
1	Algorithmic Trade											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25228	HHIIndicator	N	1	11	signed int	<p>The updated index of the HHI interval at the orders' price level, if the product is HHI enabled.</p> <p>Please note that in rare occasions the HHI might not get updated anymore and will be absent for the rest of the trading day.</p> <p><b>-1 = No Update</b> no change to the previous value sent for the same price level.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>-1</td> <td>No Update</td> </tr> <tr> <td>*</td> <td>More values</td> </tr> </tbody> </table>	Value	Description	-1	No Update	*	More values
Value	Description											
-1	No Update											
*	More values											
880	TrdMatchID	Y	4	12	unsigned int	Unique identifier for each price level (match step) of a match event; it is used for public trade reporting.						
44	Price	N	8	16	PriceType	The price at which the order entered the book. Typically it is equal to Last-Px except during auction uncrossing.						
21008	TrdRegTSTime-Priority	Y	8	24	UTCTimestamp	Priority timestamp.						
48	SecurityID	Y	8	32	signed int	Unique instrument identifier.						
32	LastQty	Y	8	40	QuantityType	Quantity executed in this fill.						
31	LastPx	Y	8	48	PriceType	The price at which the order was matched.						
</MessageBody>												

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U21	3	Fixed String	Market Data Order
28842	MarketDataType	2	1	unsigned int	Partial Order (Book) Execution
279	MDUpdateAction	1	1	unsigned int	Change
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Full Order Execution

Whenever a visible order is fully executed at its displayed price, a Full Order Execution message will be published, containing the execution information; instrument identifier, priority timestamp, price and executed quantity of the executed passive order and the match identifier. As this order is executed in full, it has to be deleted from the order book.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeader>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13104 (Market-DataOrder, MsgType = U21)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.						
</MessageHeader>												
<MessageBody>												
54	Side	Y	1	8	unsigned int	Side of the order. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Buy</td> </tr> <tr> <td>2</td> <td>Sell</td> </tr> </tbody> </table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
40	OrdType	N	1	9	unsigned int	Used for cash market instruments only. <b>1 = Market Order</b> Used for cash market instruments only. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Market Order</td> </tr> </tbody> </table>	Value	Description	1	Market Order		
Value	Description											
1	Market Order											
2667	AlgorithmicTrade-Indicator	N	1	10	unsigned int	A trade is flagged as <i>algorithmic</i> , if at least one of the matched orders was submitted by a trading algorithm. Applicable for cash market instruments only. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Algorithmic Trade</td> </tr> </tbody> </table>	Value	Description	1	Algorithmic Trade		
Value	Description											
1	Algorithmic Trade											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25228	HHIIndicator	N	1	11	signed int	<p>The updated index of the HHI interval, if the product is HHI enabled and the orders' price level still exists, otherwise no value.</p> <p>Please note that in rare occasions the HHI might not get updated anymore and will be absent for the rest of the trading day. <b>-1 = No Update</b> no change to the previous value sent for the same price level.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>-1</td> <td>No Update</td> </tr> <tr> <td>*</td> <td>More values</td> </tr> </tbody> </table>	Value	Description	-1	No Update	*	More values
Value	Description											
-1	No Update											
*	More values											
880	TrdMatchID	Y	4	12	unsigned int	Unique identifier for each price level (match step) of a match event; it is used for public trade reporting.						
44	Price	N	8	16	PriceType	The price at which the order entered the book. Typically it is equal to LastPx except during auction uncrossing.						
21008	TrdRegTSTime-Priority	Y	8	24	UTCTimestamp	Priority timestamp.						
48	SecurityID	Y	8	32	signed int	Unique instrument identifier.						
32	LastQty	Y	8	40	QuantityType	Quantity executed in this fill.						
31	LastPx	Y	8	48	PriceType	The price at which the order was matched.						
</MessageBody>												

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U21	3	Fixed String	Market Data Order
28842	MarketDataType	2	1	unsigned int	Full Order (Book) Execution
279	MDUpdateAction	1	1	unsigned int	Change
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Auction Best Bid/Offer

For most products during auctions, no order book depth information is published. For an uncrossed order book, only the BBO information for an instrument is published using Auction Best Bid/Offer messages.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeader>										
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplatelD	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13500 (MarketDataInstrument, MsgType = U23)				
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.				
</MessageHeader>										
<MessageBody>										
60	TransactTime	Y	8	8	UTCTimestamp	Official timestamp of order book entry.				
48	SecurityID	Y	8	16	signed int	Unique instrument identifier.				
132	BidPx	N	8	24	PriceType	Bid price.				
133	OfferPx	N	8	32	PriceType	Offer price.				
134	BidSize	N	8	40	QuantityType	Used for cash market instruments only.				
135	OfferSize	N	8	48	QuantityType	Used for cash market instruments only.				
28872	PotentialSecurity-TradingEvent	N	1	56	unsigned int	Used for cash market instruments only. <b>0 = None</b> Used for cash market instruments only. <table border="1" data-bbox="991 1563 1409 1648"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>None</td> </tr> </tbody> </table>	Value	Description	0	None
Value	Description									
0	None									
28784	BidOrdType	N	1	57	unsigned int	Indicates the existence of market orders on the bid side if <i>BidPx</i> is not set. Used for cash market instruments only. <table border="1" data-bbox="991 1850 1409 1935"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Market Order</td> </tr> </tbody> </table>	Value	Description	1	Market Order
Value	Description									
1	Market Order									



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
28785	OfferOrdType	N	1	58	unsigned int	Indicates the existence of market orders on the offer side if <i>OfferPx</i> is not set. Used for cash market instruments only. <table border="1" data-bbox="991 539 1409 629"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Market Order</td> </tr> </tbody> </table>	Value	Description	1	Market Order
Value	Description									
1	Market Order									
25020	Pad5	U	5	59	Fixed String	not used				

</MessageBody>

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U23	3	Fixed String	Market Data Instrument
28842	MarketDataType	5	1	unsigned int	Auction BBO
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Auction Clearing Price

During auctions, no order book depth information is published. For a crossed order book in an auction, an Auction Clearing Price message will be published, indicating the potential auction price.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<i>&lt;MessageHeader&gt;</i>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13501 (MarketDataInstrument, MsgType = U23)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.						
<i>&lt;/MessageHeader&gt;</i>												
<i>&lt;MessageBody&gt;</i>												
60	TransactTime	Y	8	8	UTCTimestamp	Transaction timestamp.						
48	SecurityID	Y	8	16	signed int	Unique instrument identifier.						
31	LastPx	Y	8	24	PriceType	Indicating the potential Auction price for a crossed order book.						
32	LastQty	N	8	32	QuantityType	Used for cash market instruments only.						
28893	ImbalanceQty	N	8	40	QuantityType	Used for cash market instruments only.						
326	SecurityTradingStatus	N	1	48	unsigned int	Used for cash market instruments only. <b>7 = Market Imbalance Buy</b> Used for cash market instruments only. <b>8 = Market Imbalance Sell</b> Used for cash market instruments only.						
						<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>7</td> <td>Market Imbalance Buy</td> </tr> <tr> <td>8</td> <td>Market Imbalance Sell</td> </tr> </tbody> </table>	Value	Description	7	Market Imbalance Buy	8	Market Imbalance Sell
Value	Description											
7	Market Imbalance Buy											
8	Market Imbalance Sell											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
28872	PotentialSecurity- TradingEvent	N	1	49	unsigned int	Used for cash market instruments only. <b>0 = None</b> Used for cash market instruments only. <b>10 = Price volatility, auction is extended</b> Used for cash market instruments only. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>None</td> </tr> <tr> <td>10</td> <td>Price volatility, auction is extended</td> </tr> </tbody> </table>	Value	Description	0	None	10	Price volatility, auction is extended
Value	Description											
0	None											
10	Price volatility, auction is extended											
25021	Pad6	U	6	50	Fixed String	not used						
</MessageBody>												

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U23	3	Fixed String	Market Data Instrument
28842	MarketDataType	6	1	unsigned int	Auction Clearing Price
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## 8.5 State Change

### Product State Change

The Product State Change message provides updates on the trading state for (all instruments in) a particular product.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
<i>&lt;MessageHeader&gt;</i>																		
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.												
28500	TemplateID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13300 (TradingSessionStatus, MsgType = h)												
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.												
<i>&lt;/MessageHeader&gt;</i>																		
<i>&lt;MessageBody&gt;</i>																		
336	TradingSessionID	Y	1	8	unsigned int	Product state information. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Day</td> </tr> <tr> <td>3</td> <td>Morning</td> </tr> <tr> <td>5</td> <td>Evening</td> </tr> <tr> <td>6</td> <td>After Hours</td> </tr> <tr> <td>7</td> <td>Holiday</td> </tr> </tbody> </table>	Value	Description	1	Day	3	Morning	5	Evening	6	After Hours	7	Holiday
Value	Description																	
1	Day																	
3	Morning																	
5	Evening																	
6	After Hours																	
7	Holiday																	
625	TradingSessionSubID	Y	1	9	unsigned int	Product state information. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Pre Trading</td> </tr> <tr> <td>3</td> <td>Continuous</td> </tr> <tr> <td>4</td> <td>Closing</td> </tr> <tr> <td>5</td> <td>Post Trading</td> </tr> <tr> <td>7</td> <td>Quiescent</td> </tr> </tbody> </table>	Value	Description	1	Pre Trading	3	Continuous	4	Closing	5	Post Trading	7	Quiescent
Value	Description																	
1	Pre Trading																	
3	Continuous																	
4	Closing																	
5	Post Trading																	
7	Quiescent																	
340	TradSesStatus	Y	1	10	unsigned int	Product state information. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Halted</td> </tr> <tr> <td>2</td> <td>Open</td> </tr> <tr> <td>3</td> <td>Closed</td> </tr> </tbody> </table>	Value	Description	1	Halted	2	Open	3	Closed				
Value	Description																	
1	Halted																	
2	Open																	
3	Closed																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
2705	MarketCondition	N	1	11	unsigned int	Indicator for stressed market conditions. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Normal</td> </tr> <tr> <td>1</td> <td>Stressed</td> </tr> </tbody> </table>	Value	Description	0	Normal	1	Stressed				
Value	Description															
0	Normal															
1	Stressed															
2447	FastMarketIndicator	Y	1	12	unsigned int	Indicates if product is in state "Fast Market". This indicator refers to a product but is provided on instrument level. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No</td> </tr> <tr> <td>1</td> <td>Yes</td> </tr> </tbody> </table>	Value	Description	0	No	1	Yes				
Value	Description															
0	No															
1	Yes															
25044	TESTradSesStatus	N	1	13	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Halted</td> </tr> <tr> <td>2</td> <td>Open</td> </tr> <tr> <td>3</td> <td>Closed</td> </tr> <tr> <td>5</td> <td>Pre Close</td> </tr> </tbody> </table>	Value	Description	1	Halted	2	Open	3	Closed	5	Pre Close
Value	Description															
1	Halted															
2	Open															
3	Closed															
5	Pre Close															
25017	Pad2	U	2	14	Fixed String	not used										
60	TransactTime	Y	8	16	UTCTimestamp	Transaction timestamp.										
<i>&lt;/MessageBody&gt;</i>																

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	h	3	Fixed String	Trading Session Status
1368	TradSesEvent	3	1	unsigned int	3 = Status Change

## Mass Instrument State Change

The Mass Instrument State Change message provides the state information for all instruments of a certain instrument type or *InstrumentScopeProductComplex (1544)* within a product. Where not all indicated instruments are affected by the new state, the exception list is populated with one entry for each such instrument.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																												
<MessageHeader>																																		
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.																												
28500	TemplateID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13302 (Security-MassStatus, MsgType = CO)																												
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.																												
</MessageHeader>																																		
<MessageBody>																																		
1544	InstrumentScope-ProductComplex	Y	1	8	unsigned int	Instrument type of affected instruments. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Simple Instrument</td> </tr> <tr> <td>2</td> <td>Standard Option Strategy</td> </tr> <tr> <td>3</td> <td>Non Standard Option Strategy</td> </tr> <tr> <td>4</td> <td>Volatility Strategy</td> </tr> <tr> <td>5</td> <td>Futures Spread</td> </tr> <tr> <td>6</td> <td>Inter Product Spread</td> </tr> <tr> <td>7</td> <td>Standard Futures Strategy</td> </tr> <tr> <td>8</td> <td>Pack And Bundle</td> </tr> <tr> <td>9</td> <td>Strip</td> </tr> <tr> <td>10</td> <td>Flexible Instrument</td> </tr> <tr> <td>11</td> <td>Commodity Strip</td> </tr> <tr> <td>12</td> <td>Scaled Simple Instrument</td> </tr> <tr> <td>13</td> <td>Non Standard Volatility Strategy</td> </tr> </tbody> </table>	Value	Description	1	Simple Instrument	2	Standard Option Strategy	3	Non Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter Product Spread	7	Standard Futures Strategy	8	Pack And Bundle	9	Strip	10	Flexible Instrument	11	Commodity Strip	12	Scaled Simple Instrument	13	Non Standard Volatility Strategy
Value	Description																																	
1	Simple Instrument																																	
2	Standard Option Strategy																																	
3	Non Standard Option Strategy																																	
4	Volatility Strategy																																	
5	Futures Spread																																	
6	Inter Product Spread																																	
7	Standard Futures Strategy																																	
8	Pack And Bundle																																	
9	Strip																																	
10	Flexible Instrument																																	
11	Commodity Strip																																	
12	Scaled Simple Instrument																																	
13	Non Standard Volatility Strategy																																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																		
30965	SecurityMassStatus	Y	1	9	unsigned int	<p>The instrument status of all affected instruments.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Active</td> </tr> <tr> <td>2</td> <td>Inactive</td> </tr> <tr> <td>4</td> <td>Expired</td> </tr> <tr> <td>6</td> <td>Knocked Out</td> </tr> <tr> <td>7</td> <td>Knock Out Revoked</td> </tr> <tr> <td>9</td> <td>Suspended</td> </tr> <tr> <td>11</td> <td>Pending Deletion</td> </tr> <tr> <td>12</td> <td>Knocked Out And Suspended</td> </tr> </tbody> </table>	Value	Description	1	Active	2	Inactive	4	Expired	6	Knocked Out	7	Knock Out Revoked	9	Suspended	11	Pending Deletion	12	Knocked Out And Suspended
Value	Description																							
1	Active																							
2	Inactive																							
4	Expired																							
6	Knocked Out																							
7	Knock Out Revoked																							
9	Suspended																							
11	Pending Deletion																							
12	Knocked Out And Suspended																							
1679	SecurityMassTrading-Status	N	1	10	unsigned int	<p>The instrument trading state of all affected instruments.</p> <p>Valid values are listed after this table.</p>																		
28894	MassMarketCondition	Y	1	11	unsigned int	<p>Indicator for stressed market conditions of all affected instruments.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Normal</td> </tr> <tr> <td>1</td> <td>Stressed</td> </tr> </tbody> </table>	Value	Description	0	Normal	1	Stressed												
Value	Description																							
0	Normal																							
1	Stressed																							
2447	FastMarketIndicator	Y	1	12	unsigned int	<p>Indicates if product is in state "Fast Market". This indicator refers to a product but is provided on instrument level.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No</td> </tr> <tr> <td>1</td> <td>Yes</td> </tr> </tbody> </table>	Value	Description	0	No	1	Yes												
Value	Description																							
0	No																							
1	Yes																							
1680	SecurityMassTrading-Event	N	1	13	unsigned int	<p>Identifies an event related to a <i>SecurityMassTradingStatus (1679)</i>. Used for cash market instruments only.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>Price volatility, auction is extended</td> </tr> <tr> <td>11</td> <td>Price volatility, auction is extended again</td> </tr> </tbody> </table>	Value	Description	10	Price volatility, auction is extended	11	Price volatility, auction is extended again												
Value	Description																							
10	Price volatility, auction is extended																							
11	Price volatility, auction is extended again																							

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
35155	MassSoldOutIndicator	N	1	14	unsigned int	Identifies the sold out status of all affected instruments. Only applicable for trading model Continuous Auction Issuer for cash market products. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sold Out</td> </tr> </tbody> </table>	Value	Description	1	Sold Out						
Value	Description															
1	Sold Out															
35045	TESecurityMass-Status	N	1	15	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Active</td> </tr> <tr> <td>2</td> <td>Inactive</td> </tr> <tr> <td>4</td> <td>Expired</td> </tr> <tr> <td>9</td> <td>Suspended</td> </tr> </tbody> </table>	Value	Description	1	Active	2	Inactive	4	Expired	9	Suspended
Value	Description															
1	Active															
2	Inactive															
4	Expired															
9	Suspended															
60	TransactTime	Y	8	16	UTCTimestamp	Transaction timestamp.										
893	LastFragment	Y	1	24	unsigned int	Indicates whether this message is the last in a sequence of messages that together convey a joint exception list of SecMassStatGrp. All messages up to the last with <i>LastFragment</i> = Y share the same root level content and an application first needs to combine all single exception lists before the Mass State Change message could be applied with the fully joint exception list. <b>N</b> = Not Last Message <b>Y</b> = Last Message <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>N</td> </tr> <tr> <td>1</td> <td>Y</td> </tr> </tbody> </table>	Value	Description	0	N	1	Y				
Value	Description															
0	N															
1	Y															
146	NoRelatedSym	Y	1	25	Counter	Specifies the number of following instrument state exceptions.										
25021	Pad6	U	6	26	Fixed String	not used										
<i>&lt;SecMassStatGrp&gt; Variable size array, Record counter: NoRelatedSym</i>																
48	>SecurityID	Y	8	32	signed int	Unique instrument identifier.										
332	>HighPx	N	8	40	PriceType	See <i>Instrument State Change</i> .										
333	>LowPx	N	8	48	PriceType	See <i>Instrument State Change</i> .										



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																		
965	>SecurityStatus	Y	1	56	unsigned int	See <i>Instrument State Change</i> . <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Active</td> </tr> <tr> <td>2</td> <td>Inactive</td> </tr> <tr> <td>4</td> <td>Expired</td> </tr> <tr> <td>6</td> <td>Knocked Out</td> </tr> <tr> <td>7</td> <td>Knock Out Revoked</td> </tr> <tr> <td>9</td> <td>Suspended</td> </tr> <tr> <td>11</td> <td>Pending Deletion</td> </tr> <tr> <td>12</td> <td>Knocked Out And Suspended</td> </tr> </tbody> </table>	Value	Description	1	Active	2	Inactive	4	Expired	6	Knocked Out	7	Knock Out Revoked	9	Suspended	11	Pending Deletion	12	Knocked Out And Suspended
Value	Description																							
1	Active																							
2	Inactive																							
4	Expired																							
6	Knocked Out																							
7	Knock Out Revoked																							
9	Suspended																							
11	Pending Deletion																							
12	Knocked Out And Suspended																							
326	>SecurityTrading-Status	N	1	57	unsigned int	See <i>Instrument State Change</i> . Valid values are listed after this table.																		
2705	>MarketCondition	Y	1	58	unsigned int	See <i>Instrument State Change</i> . <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Normal</td> </tr> <tr> <td>1</td> <td>Stressed</td> </tr> </tbody> </table>	Value	Description	0	Normal	1	Stressed												
Value	Description																							
0	Normal																							
1	Stressed																							
1174	>SecurityTrading-Event	N	1	59	unsigned int	See <i>Instrument State Change</i> . <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>Price volatility, auction is extended</td> </tr> <tr> <td>11</td> <td>Price volatility, auction is extended again</td> </tr> </tbody> </table>	Value	Description	10	Price volatility, auction is extended	11	Price volatility, auction is extended again												
Value	Description																							
10	Price volatility, auction is extended																							
11	Price volatility, auction is extended again																							
25155	>SoldOutIndicator	N	1	60	unsigned int	See <i>Instrument State Change</i> . <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sold Out</td> </tr> </tbody> </table>	Value	Description	1	Sold Out														
Value	Description																							
1	Sold Out																							
25045	>TESSecurityStatus	N	1	61	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Active</td> </tr> <tr> <td>2</td> <td>Inactive</td> </tr> <tr> <td>4</td> <td>Expired</td> </tr> <tr> <td>9</td> <td>Suspended</td> </tr> </tbody> </table>	Value	Description	1	Active	2	Inactive	4	Expired	9	Suspended								
Value	Description																							
1	Active																							
2	Inactive																							
4	Expired																							
9	Suspended																							
25017	>Pad2	U	2	62	Fixed String	not used																		
</SecMassStatGrp>																								
</MessageBody>																								

Valid Values of SecurityMassTradingStatus (datatype SecurityMassTradingStatus)

Valid Value	Description
2	Trading Halt
200	Closed
201	Restricted
202	Book
203	Continuous
204	Opening Auction
205	Opening Auction Freeze
206	Intraday Auction
207	Intraday Auction Freeze
208	Circuit Breaker Auction
209	Circuit Breaker Auction Freeze
210	Closing Auction
211	Closing Auction Freeze
212	IPOAuction
213	IPOAuction Freeze
214	Pre Call
215	Call
216	Freeze
217	Trade At Close
220	Circuit Breaker Auction Triggered By Static Limit Breach
221	Circuit Breaker Auction Triggered By Static Limit Breach Freeze

Valid Values of SecurityTradingStatus (datatype SecurityTradingStatus)

Valid Value	Description
2	Trading Halt
200	Closed
201	Restricted
202	Book
203	Continuous
204	Opening Auction
205	Opening Auction Freeze
206	Intraday Auction
207	Intraday Auction Freeze
208	Circuit Breaker Auction
209	Circuit Breaker Auction Freeze
220	Circuit Breaker Auction Triggered By Static Limit Breach
221	Circuit Breaker Auction Triggered By Static Limit Breach Freeze
210	Closing Auction
211	Closing Auction Freeze

212	IPOAuction
213	IPOAuction Freeze
214	Pre Call
215	Call
216	Freeze
217	Trade At Close

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	CO	3	Fixed String	Security Mass Status
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Instrument State Change

The Instrument State Change message provides state information for a single instrument. Furthermore, it informs participants about intra-day expiration of instruments.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																		
<i>&lt;MessageHeader&gt;</i>																								
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.																		
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13301 (SecurityStatus, MsgType = f)																		
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.																		
<i>&lt;/MessageHeader&gt;</i>																								
<i>&lt;MessageBody&gt;</i>																								
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.																		
965	SecurityStatus	Y	1	16	unsigned int	<p><b>6 = Knocked Out, 7 = Knock Out Revoked and 12 = Knocked Out And Suspended</b> are only applicable for trading model Continuous Auction Issuer for cash market products.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Active</td> </tr> <tr> <td>2</td> <td>Inactive</td> </tr> <tr> <td>4</td> <td>Expired</td> </tr> <tr> <td>6</td> <td>Knocked Out</td> </tr> <tr> <td>7</td> <td>Knock Out Revoked</td> </tr> <tr> <td>9</td> <td>Suspended</td> </tr> <tr> <td>11</td> <td>Pending Deletion</td> </tr> <tr> <td>12</td> <td>Knocked Out And Suspended</td> </tr> </tbody> </table>	Value	Description	1	Active	2	Inactive	4	Expired	6	Knocked Out	7	Knock Out Revoked	9	Suspended	11	Pending Deletion	12	Knocked Out And Suspended
Value	Description																							
1	Active																							
2	Inactive																							
4	Expired																							
6	Knocked Out																							
7	Knock Out Revoked																							
9	Suspended																							
11	Pending Deletion																							
12	Knocked Out And Suspended																							

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
326	SecurityTradingStatus	N	1	17	unsigned int	Instrument trading state. <b>212 = IPOAuction</b> Used for cash market instruments only. <b>213 = IPOAuction Freeze</b> Used for cash market instruments only. <b>214 = Pre Call</b> only applicable for trading model Continuous Auction Issuer and Specialist for cash market products. <b>215 = Call</b> only applicable for trading model Continuous Auction Issuer for cash market products. <b>216 = Freeze</b> only applicable for trading model Continuous Auction Specialist for cash market products.  Valid values are listed after this table.						
2705	MarketCondition	Y	1	18	unsigned int	Indicator for stressed market conditions. <table border="1" data-bbox="991 1167 1412 1294"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Normal</td> </tr> <tr> <td>1</td> <td>Stressed</td> </tr> </tbody> </table>	Value	Description	0	Normal	1	Stressed
Value	Description											
0	Normal											
1	Stressed											
2447	FastMarketIndicator	Y	1	19	unsigned int	Indicates if product is in state "Fast Market". This indicator refers to a product but is provided on instrument level. <table border="1" data-bbox="991 1491 1412 1619"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No</td> </tr> <tr> <td>1</td> <td>Yes</td> </tr> </tbody> </table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1174	SecurityTradingEvent	N	1	20	unsigned int	<p>Used for cash market instruments only.</p> <p><b>10 = Price volatility, auction is extended</b> Used for cash market instruments only.</p> <p><b>11 = Price volatility, auction is extended again</b> Used for cash market instruments only.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>Price volatility, auction is extended</td> </tr> <tr> <td>11</td> <td>Price volatility, auction is extended again</td> </tr> </tbody> </table>	Value	Description	10	Price volatility, auction is extended	11	Price volatility, auction is extended again
Value	Description											
10	Price volatility, auction is extended											
11	Price volatility, auction is extended again											
25155	SoldOutIndicator	N	1	21	unsigned int	<p>Only applicable for trading model Continuous Auction Issuer for cash market products.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sold Out</td> </tr> </tbody> </table>	Value	Description	1	Sold Out		
Value	Description											
1	Sold Out											
25017	Pad2	U	2	22	Fixed String	not used						
332	HighPx	N	8	24	PriceType	Upper boundary price. For scheduled auctions (e.g. opening auction), it may be set together with SecurityTradingEvent) (1174) 10 = Price volatility, auction is extended. For volatility auctions it may be set immediately without SecurityTradingEvent) (1174). Only applicable for cash market instruments.						
333	LowPx	N	8	32	PriceType	Lower boundary price. For scheduled auctions (e.g. opening auction), it may be set together with SecurityTradingEvent) (1174) 10 = Price volatility, auction is extended. For volatility auctions it may be set immediately without SecurityTradingEvent) (1174). Only applicable for cash market instruments.						
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
25045	TESSecurityStatus	N	1	48	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Active</td> </tr> <tr> <td>2</td> <td>Inactive</td> </tr> <tr> <td>4</td> <td>Expired</td> </tr> <tr> <td>9</td> <td>Suspended</td> </tr> </tbody> </table>	Value	Description	1	Active	2	Inactive	4	Expired	9	Suspended
Value	Description															
1	Active															
2	Inactive															
4	Expired															
9	Suspended															
25022	Pad7	U	7	49	Fixed String	not used										

</MessageBody>

Valid Values of SecurityTradingStatus (datatype SecurityTradingStatus)

Valid Value	Description
2	Trading Halt
200	Closed
201	Restricted
202	Book
203	Continuous
204	Opening Auction
205	Opening Auction Freeze
206	Intraday Auction
207	Intraday Auction Freeze
208	Circuit Breaker Auction
209	Circuit Breaker Auction Freeze
220	Circuit Breaker Auction Triggered By Static Limit Breach
221	Circuit Breaker Auction Triggered By Static Limit Breach Freeze
210	Closing Auction
211	Closing Auction Freeze
212	IPOAuction
213	IPOAuction Freeze
214	Pre Call
215	Call
216	Freeze
217	Trade At Close

**Implied Message Constants**

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	f	3	Fixed String	Security Status

Tag	Field Name	Field Value	Length	Data Type	Description
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.



## 8.6 Reference Data

### Add Complex Instrument

Whenever a new complex instrument is created or an existing complex instrument is modified, an Add Complex Instrument message will be published.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<i>&lt;MessageHeader&gt;</i>						
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13400 (Security-DefinitionUpdateReport, MsgType = BP)
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.
<i>&lt;/MessageHeader&gt;</i>						
<i>&lt;MessageBody&gt;</i>						
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.
60	TransactTime	Y	8	16	UTCTimestamp	Transaction timestamp.
107	SecurityDesc	Y	40	24	Fixed String	Human readable description of instrument. Valid characters: \x00-\xFF
762	SecuritySubType	N	4	64	signed int	Strategy Type.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																						
1227	ProductComplex	Y	1	68	unsigned int	<p><b>2 = Standard Option Strategy</b> Only used for option products.  <b>3 = Non Standard Option Strategy</b> Only used for option products.  <b>4 = Volatility Strategy</b> Only used for option products. <b>13 = Non Standard Volatility Strategy</b> Only used for option products.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>Standard Option Strategy</td> </tr> <tr> <td>3</td> <td>Non Standard Option Strategy</td> </tr> <tr> <td>4</td> <td>Volatility Strategy</td> </tr> <tr> <td>5</td> <td>Futures Spread</td> </tr> <tr> <td>6</td> <td>Inter Product Spread</td> </tr> <tr> <td>7</td> <td>Standard Futures Strategy</td> </tr> <tr> <td>8</td> <td>Pack And Bundle</td> </tr> <tr> <td>9</td> <td>Strip</td> </tr> <tr> <td>11</td> <td>Commodity Strip</td> </tr> <tr> <td>13</td> <td>Non Standard Volatility Strategy</td> </tr> </tbody> </table>	Value	Description	2	Standard Option Strategy	3	Non Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter Product Spread	7	Standard Futures Strategy	8	Pack And Bundle	9	Strip	11	Commodity Strip	13	Non Standard Volatility Strategy
Value	Description																											
2	Standard Option Strategy																											
3	Non Standard Option Strategy																											
4	Volatility Strategy																											
5	Futures Spread																											
6	Inter Product Spread																											
7	Standard Futures Strategy																											
8	Pack And Bundle																											
9	Strip																											
11	Commodity Strip																											
13	Non Standard Volatility Strategy																											
1144	ImpliedMarketIndicator	Y	1	69	unsigned int	<p>Indicates that an implied market to be created for either the legs of a multi-leg instrument (Implied-in) or for the multi-leg instrument based on the existence of the legs (Implied-out). Determination as to whether implied markets should be created is generally done at the level of the multi-leg instrument. Commonly used in listed derivatives.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Not Implied</td> </tr> <tr> <td>3</td> <td>Implied In Out</td> </tr> </tbody> </table>	Value	Description	0	Not Implied	3	Implied In Out																
Value	Description																											
0	Not Implied																											
3	Implied In Out																											
28907	QuantityScalingFactor	N	2	70	unsigned int																							
28900	LegRatioMultiplier	N	4	72	unsigned int	Common integer multiple of the option legs for Option Volatility Strategies.																						
555	NoLegs	Y	1	76	Counter	Number of Legs repeating group instances.																						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25017	Pad2	N	2	77	Fixed String	Data structure padding (2 bytes). Valid characters: \x01-\x7E						
893	LastFragment	Y	1	79	unsigned int	Indicates whether this message is the last in a sequence of messages that together convey a joint AddComplexInstrument. All messages up to the last with <i>LastFragment</i> = Y share the same root level content and an application first needs to combine all single InstrmtLegGrp lists before the complex instrument is complete. Note: A <i>LastFragment</i> = N is only foreseen for commodity strips.						
<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>N</td> </tr> <tr> <td>1</td> <td>Y</td> </tr> </tbody> </table>							Value	Description	0	N	1	Y
Value	Description											
0	N											
1	Y											
<i>&lt;InstrmtLegGrp&gt; Variable size array, Record counter: NoLegs</i>												
600	>LegSymbol	Y	4	80	signed int	Product identifier of the leg security.						
25019	>Pad4	U	4	84	Fixed String	not used						
602	>LegSecurityID	Y	8	88	signed int	Instrument identifier of the leg security.						
566	>LegPrice	N	8	96	PriceType	Strategy leg underlying price (only applicable for underlying leg).						
623	>LegRatioQty	Y	4	104	signed int	The ratio of quantity for this individual leg relative to the entire multi-leg security.						
609	>LegSecurityType	Y	1	108	unsigned int	Indicates type of leg.						
<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Leg Security Multi Leg</td> </tr> <tr> <td>2</td> <td>Leg Security Underlying Leg</td> </tr> </tbody> </table>							Value	Description	1	Leg Security Multi Leg	2	Leg Security Underlying Leg
Value	Description											
1	Leg Security Multi Leg											
2	Leg Security Underlying Leg											
624	>LegSide	Y	1	109	unsigned int	The side of the individual leg of a strategy as defined in signature.						
<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Buy</td> </tr> <tr> <td>2</td> <td>Sell</td> </tr> </tbody> </table>							Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
25017	>Pad2	U	2	110	Fixed String	not used						
<i>&lt;/InstrmtLegGrp&gt;</i>												
<i>&lt;/MessageBody&gt;</i>												

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	BP	3	Fixed String	Security Definition Update Report
28842	MarketDataType	14	1	unsigned int	Add Complex Instrument
980	SecurityUpdateAction	A	1	Fixed String	A = Add
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.
603	LegSecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.
1310	NoMarketSegments	1	1	unsigned int	1 = One
167	SecurityType	3	1	unsigned int	MLEG = Multi Leg

## Add Flexible Instrument

Whenever a new flexible instrument is created, an Add Flexible Instrument message will be published.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeader>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13401 (Security-DefinitionUpdateReport, MsgType = BP)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.						
</MessageHeader>												
<MessageBody>												
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.						
60	TransactTime	Y	8	16	UTCTimestamp	Transaction timestamp.						
107	SecurityDesc	Y	40	24	Fixed String	The format depends on the <i>Security-Type</i> of the instrument, e.g. <b>1 = Option</b> OGBM FI 20140516 CS AM P 101.82 0 <b>2 = Future</b> FGBM FI 20140620 CS Valid characters: \x00-\xFF						
167	SecurityType	Y	1	64	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Option</td> </tr> <tr> <td>2</td> <td>Future</td> </tr> </tbody> </table>	Value	Description	1	Option	2	Future
Value	Description											
1	Option											
2	Future											
201	PutOrCall	N	1	65	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Put</td> </tr> <tr> <td>1</td> <td>Call</td> </tr> </tbody> </table>	Value	Description	0	Put	1	Call
Value	Description											
0	Put											
1	Call											
1194	ExerciseStyle	N	1	66	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>European</td> </tr> <tr> <td>1</td> <td>American</td> </tr> </tbody> </table>	Value	Description	0	European	1	American
Value	Description											
0	European											
1	American											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1193	SettlMethod	Y	1	67	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Cash</td> </tr> <tr> <td>1</td> <td>Physical</td> </tr> </tbody> </table>	Value	Description	0	Cash	1	Physical
Value	Description											
0	Cash											
1	Physical											
541	MaturityDate	Y	4	68	unsigned int	Expiration day of the instrument (YYYYMMDD).						
202	StrikePrice	N	8	72	PriceType							
206	OptAttribute	N	4	80	unsigned int							
30866	ContractDate	Y	4	84	unsigned int	Contract day of the instrument (YYYYMMDD).						
</MessageBody>												

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	BP	3	Fixed String	Defines message type. ALWAYS FIRST FIELD IN MESSAGE. (Always unencrypted) Note: A 'U' as the first character in the MsgType field (i.e. U, U2, etc) indicates that the message format is privately defined between the sender and receiver.
28842	MarketDataType	17	1	unsigned int	
980	SecurityUpdateAction	A	1	Fixed String	
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.
1227	ProductComplex	10	1	unsigned int	Flexible Instrument
1310	NoMarketSegments	1	1	unsigned int	

## Add Scaled Simple Instrument

Whenever a new scaled simple instrument is created, an Add Scaled Simple Instrument message will be published. Please note that this message may only be published for derivatives markets products and only if the product supports scaled simple instruments.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeader>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13402 (Security-DefinitionUpdateReport, MsgType = BP)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per product across all message types.						
</MessageHeader>												
<MessageBody>												
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.						
60	TransactTime	Y	8	16	UTCTimestamp	Transaction timestamp.						
107	SecurityDesc	Y	40	24	Fixed String	The format depends on the <i>Security-Type</i> of the instrument, e.g. <b>1 = Option</b> OGBM FI 20140516 CS AM P 101.82 0 <b>2 = Future</b> FGBM FI 20140620 CS Valid characters: \x00-\xFF						
167	SecurityType	Y	1	64	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Option</td> </tr> <tr> <td>2</td> <td>Future</td> </tr> </tbody> </table>	Value	Description	1	Option	2	Future
Value	Description											
1	Option											
2	Future											
25016	Pad1	U	1	65	Fixed String	not used						
28907	QuantityScalingFactor	Y	2	66	unsigned int							
25019	Pad4	U	4	68	Fixed String	not used						
<RelatedInstrumentGrp>												
1650	RelatedSecurityID	Y	8	72	signed int							
</RelatedInstrumentGrp>												
</MessageBody>												

## Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	BP	3	Fixed String	Defines message type. ALWAYS FIRST FIELD IN MESSAGE. (Always unencrypted) Note: A 'U' as the first character in the MsgType field (i.e. U, U2, etc) indicates that the message format is privately defined between the sender and receiver.
28842	MarketDataType	18	1	unsigned int	
980	SecurityUpdateAction	A	1	Fixed String	
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.
1227	ProductComplex	12	1	unsigned int	Scaled Simple Instrument
1651	RelatedSecurity-IDSource	M	1	Fixed String	Marketplace assigned identifier.
1310	NoMarketSegments	1	1	unsigned int	



## 8.7 Snapshot

### Product Summary

A Product Summary message will be published once each snapshot cycle, and will contain attributes that are equal for all instruments that belong to that product.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
<i>&lt;MessageHeader&gt;</i>																		
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.												
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13600 (MarketDataInstrument, MsgType = U23)												
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per snapshot cycle per channel. Starts with 0.												
<i>&lt;/MessageHeader&gt;</i>																		
<i>&lt;MessageBody&gt;</i>																		
369	LastMsgSeqNum-Processed	Y	4	8	unsigned int	Last Message Sequence number that was processed, regardless of message type.												
336	TradingSessionID	N	1	12	unsigned int	Product state information. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Day</td> </tr> <tr> <td>3</td> <td>Morning</td> </tr> <tr> <td>5</td> <td>Evening</td> </tr> <tr> <td>6</td> <td>After Hours</td> </tr> <tr> <td>7</td> <td>Holiday</td> </tr> </tbody> </table>	Value	Description	1	Day	3	Morning	5	Evening	6	After Hours	7	Holiday
Value	Description																	
1	Day																	
3	Morning																	
5	Evening																	
6	After Hours																	
7	Holiday																	
625	TradingSessionSubID	N	1	13	unsigned int	Product state information. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Pre Trading</td> </tr> <tr> <td>3</td> <td>Continuous</td> </tr> <tr> <td>4</td> <td>Closing</td> </tr> <tr> <td>5</td> <td>Post Trading</td> </tr> <tr> <td>7</td> <td>Quiescent</td> </tr> </tbody> </table>	Value	Description	1	Pre Trading	3	Continuous	4	Closing	5	Post Trading	7	Quiescent
Value	Description																	
1	Pre Trading																	
3	Continuous																	
4	Closing																	
5	Post Trading																	
7	Quiescent																	
340	TradSesStatus	N	1	14	unsigned int	Product state information. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Halted</td> </tr> <tr> <td>2</td> <td>Open</td> </tr> <tr> <td>3</td> <td>Closed</td> </tr> </tbody> </table>	Value	Description	1	Halted	2	Open	3	Closed				
Value	Description																	
1	Halted																	
2	Open																	
3	Closed																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
2705	MarketCondition	N	1	15	unsigned int	Indicator for stressed market conditions. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Normal</td> </tr> <tr> <td>1</td> <td>Stressed</td> </tr> </tbody> </table>	Value	Description	0	Normal	1	Stressed				
Value	Description															
0	Normal															
1	Stressed															
2447	FastMarketIndicator	Y	1	16	unsigned int	Indicates if product is in state "Fast Market". This indicator refers to a product but is provided on instrument level. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No</td> </tr> <tr> <td>1</td> <td>Yes</td> </tr> </tbody> </table>	Value	Description	0	No	1	Yes				
Value	Description															
0	No															
1	Yes															
25044	TESTradSesStatus	N	1	17	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Halted</td> </tr> <tr> <td>2</td> <td>Open</td> </tr> <tr> <td>3</td> <td>Closed</td> </tr> <tr> <td>5</td> <td>Pre Close</td> </tr> </tbody> </table>	Value	Description	1	Halted	2	Open	3	Closed	5	Pre Close
Value	Description															
1	Halted															
2	Open															
3	Closed															
5	Pre Close															
25021	Pad6	U	6	18	Fixed String	not used										
<i>&lt;/MessageBody&gt;</i>																

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U23	3	Fixed String	Market Data Instrument
28842	MarketDataType	9	1	unsigned int	Market Segment Snapshot

## Instrument Summary

An Instrument Summary message will be published for each instrument in one snapshot cycle on the T7 Enhanced Order Book Interface snapshot channel, and will contain instrument state information and trade statistics for one instrument. Note that one product can have multiple instruments. The repeating group MDEntryGrp, instrument's trade statistics, are not cut off by design.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																		
<MessageHeader>																								
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.																		
28500	TemplatID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13601 (MarketDataInstrument, MsgType = U23)																		
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per snapshot cycle per channel.																		
</MessageHeader>																								
<MessageBody>																								
48	SecurityID	Y	8	8	signed int	Unique instrument identifier.																		
779	LastUpdateTime	Y	8	16	UTCTimestamp	Last update time of the corresponding order book.																		
21001	TrdRegTSExecution-Time	N	8	24	UTCTimestamp	Last matching execution timestamp.																		
68	TotNoOrders	Y	2	32	Counter	Corresponding number of orders for this instrument.																		
965	SecurityStatus	Y	1	34	unsigned int	<p><b>6 = Knocked Out, 7 = Knock Out Revoked and 12 = Knocked Out And Suspended</b> are only applicable for trading model Continuous Auction Issuer for cash market products.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Active</td> </tr> <tr> <td>2</td> <td>Inactive</td> </tr> <tr> <td>4</td> <td>Expired</td> </tr> <tr> <td>6</td> <td>Knocked Out</td> </tr> <tr> <td>7</td> <td>Knock Out Revoked</td> </tr> <tr> <td>9</td> <td>Suspended</td> </tr> <tr> <td>11</td> <td>Pending Deletion</td> </tr> <tr> <td>12</td> <td>Knocked Out And Suspended</td> </tr> </tbody> </table>	Value	Description	1	Active	2	Inactive	4	Expired	6	Knocked Out	7	Knock Out Revoked	9	Suspended	11	Pending Deletion	12	Knocked Out And Suspended
Value	Description																							
1	Active																							
2	Inactive																							
4	Expired																							
6	Knocked Out																							
7	Knock Out Revoked																							
9	Suspended																							
11	Pending Deletion																							
12	Knocked Out And Suspended																							

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
326	SecurityTradingStatus	N	1	35	unsigned int	Instrument trading state. <b>212 = IPOAuction</b> Used for cash market instruments only. <b>213 = IPOAuction Freeze</b> Used for cash market instruments only. <b>214 = Pre Call</b> only applicable for trading model Continuous Auction Issuer and Specialist for cash market products. <b>215 = Call</b> only applicable for trading model Continuous Auction Issuer for cash market products. <b>216 = Freeze</b> only applicable for trading model Continuous Auction Specialist for cash market products.  Valid values are listed after this table.						
2705	MarketCondition	Y	1	36	unsigned int	Indicator for stressed market conditions. <table border="1" data-bbox="991 1167 1412 1294"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Normal</td> </tr> <tr> <td>1</td> <td>Stressed</td> </tr> </tbody> </table>	Value	Description	0	Normal	1	Stressed
Value	Description											
0	Normal											
1	Stressed											
2447	FastMarketIndicator	Y	1	37	unsigned int	Indicates if product is in state "Fast Market". This indicator refers to a product but is provided on instrument level. <table border="1" data-bbox="991 1491 1412 1619"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No</td> </tr> <tr> <td>1</td> <td>Yes</td> </tr> </tbody> </table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1174	SecurityTradingEvent	N	1	38	unsigned int	<p>Used for cash market instruments only.</p> <p><b>10 = Price volatility, auction is extended</b> Used for cash market instruments only.</p> <p><b>11 = Price volatility, auction is extended again</b> Used for cash market instruments only.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>Price volatility, auction is extended</td> </tr> <tr> <td>11</td> <td>Price volatility, auction is extended again</td> </tr> </tbody> </table>	Value	Description	10	Price volatility, auction is extended	11	Price volatility, auction is extended again
Value	Description											
10	Price volatility, auction is extended											
11	Price volatility, auction is extended again											
25155	SoldOutIndicator	N	1	39	unsigned int	<p>Only applicable for trading model Continuous Auction Issuer for cash market products.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sold Out</td> </tr> </tbody> </table>	Value	Description	1	Sold Out		
Value	Description											
1	Sold Out											
332	HighPx	N	8	40	PriceType	<p>Upper boundary price. For scheduled auctions (e.g. opening auction), it may be set together with SecurityTradingEvent) (1174) 10 = Price volatility, auction is extended. For volatility auctions it may be set immediately without SecurityTradingEvent) (1174). Only applicable for cash market instruments.</p>						
333	LowPx	N	8	48	PriceType	<p>Lower boundary price. For scheduled auctions (e.g. opening auction), it may be set together with SecurityTradingEvent) (1174) 10 = Price volatility, auction is extended. For volatility auctions it may be set immediately without SecurityTradingEvent) (1174). Only applicable for cash market instruments.</p>						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																												
1227	ProductComplex	Y	1	56	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Simple Instrument</td> </tr> <tr> <td>2</td> <td>Standard Option Strategy</td> </tr> <tr> <td>3</td> <td>Non Standard Option Strategy</td> </tr> <tr> <td>4</td> <td>Volatility Strategy</td> </tr> <tr> <td>5</td> <td>Futures Spread</td> </tr> <tr> <td>6</td> <td>Inter Product Spread</td> </tr> <tr> <td>7</td> <td>Standard Futures Strategy</td> </tr> <tr> <td>8</td> <td>Pack And Bundle</td> </tr> <tr> <td>9</td> <td>Strip</td> </tr> <tr> <td>10</td> <td>Flexible Instrument</td> </tr> <tr> <td>11</td> <td>Commodity Strip</td> </tr> <tr> <td>12</td> <td>Scaled Simple Instrument</td> </tr> <tr> <td>13</td> <td>Non Standard Volatility Strategy</td> </tr> </tbody> </table>	Value	Description	1	Simple Instrument	2	Standard Option Strategy	3	Non Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter Product Spread	7	Standard Futures Strategy	8	Pack And Bundle	9	Strip	10	Flexible Instrument	11	Commodity Strip	12	Scaled Simple Instrument	13	Non Standard Volatility Strategy
Value	Description																																	
1	Simple Instrument																																	
2	Standard Option Strategy																																	
3	Non Standard Option Strategy																																	
4	Volatility Strategy																																	
5	Futures Spread																																	
6	Inter Product Spread																																	
7	Standard Futures Strategy																																	
8	Pack And Bundle																																	
9	Strip																																	
10	Flexible Instrument																																	
11	Commodity Strip																																	
12	Scaled Simple Instrument																																	
13	Non Standard Volatility Strategy																																	
268	NoMDEntries	Y	1	57	Counter	Number of entries in Market Data message for MDEntryGrp.																												
25045	TESSecurityStatus	N	1	58	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Active</td> </tr> <tr> <td>2</td> <td>Inactive</td> </tr> <tr> <td>4</td> <td>Expired</td> </tr> <tr> <td>9</td> <td>Suspended</td> </tr> </tbody> </table>	Value	Description	1	Active	2	Inactive	4	Expired	9	Suspended																		
Value	Description																																	
1	Active																																	
2	Inactive																																	
4	Expired																																	
9	Suspended																																	
25020	Pad5	U	5	59	Fixed String	not used																												
<i>&lt;MDInstrumentEntryGrp&gt; Variable size array, Record counter: NoMDEntries</i>																																		
270	>MDEntryPx	N	8	64	PriceType	Price.																												
271	>MDEntrySize	N	8	72	QuantityType	Quantity.																												
1024	>MDOriginType	N	1	80	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Book</td> </tr> <tr> <td>1</td> <td>Off Book</td> </tr> </tbody> </table>	Value	Description	0	Book	1	Off Book																						
Value	Description																																	
0	Book																																	
1	Off Book																																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																										
269	>MDEntryType	Y	1	81	unsigned int	Type of market data entry. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>Trade</td> </tr> <tr> <td>4</td> <td>Opening Price</td> </tr> <tr> <td>5</td> <td>Closing Price</td> </tr> <tr> <td>7</td> <td>High Price</td> </tr> <tr> <td>8</td> <td>Low Price</td> </tr> <tr> <td>66</td> <td>Trade Volume</td> </tr> <tr> <td>101</td> <td>Previous Closing Price</td> </tr> <tr> <td>200</td> <td>Opening Auction</td> </tr> <tr> <td>201</td> <td>Intraday Auction</td> </tr> <tr> <td>202</td> <td>Circuit Breaker Auction</td> </tr> <tr> <td>203</td> <td>Closing Auction</td> </tr> <tr> <td>204</td> <td>IPOAuction</td> </tr> </tbody> </table>	Value	Description	2	Trade	4	Opening Price	5	Closing Price	7	High Price	8	Low Price	66	Trade Volume	101	Previous Closing Price	200	Opening Auction	201	Intraday Auction	202	Circuit Breaker Auction	203	Closing Auction	204	IPOAuction
Value	Description																															
2	Trade																															
4	Opening Price																															
5	Closing Price																															
7	High Price																															
8	Low Price																															
66	Trade Volume																															
101	Previous Closing Price																															
200	Opening Auction																															
201	Intraday Auction																															
202	Circuit Breaker Auction																															
203	Closing Auction																															
204	IPOAuction																															
277	>TradeCondition	N	2	82	unsigned int	May be set together with <i>MDEntryType</i> (269) 2 = Trade or 66 = Trade Volume. <b>107 = Out of sequence (k)</b> Set for trades which are part of a basket trade. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>107</td> <td>Out of sequence (k)</td> </tr> <tr> <td>624</td> <td>Trade At Close (TC)</td> </tr> <tr> <td>743</td> <td>Retail (XR)</td> </tr> <tr> <td>155</td> <td>Midpoint Price (BB)</td> </tr> </tbody> </table>	Value	Description	107	Out of sequence (k)	624	Trade At Close (TC)	743	Retail (XR)	155	Midpoint Price (BB)																
Value	Description																															
107	Out of sequence (k)																															
624	Trade At Close (TC)																															
743	Retail (XR)																															
155	Midpoint Price (BB)																															
828	>TrdType	N	2	84	unsigned int	 <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Block Trade</td> </tr> <tr> <td>2</td> <td>Exchange For Physical</td> </tr> <tr> <td>54</td> <td>OTC</td> </tr> <tr> <td>55</td> <td>ExchangeBasisFacility</td> </tr> <tr> <td>1000</td> <td>Vola Trade</td> </tr> <tr> <td>1001</td> <td>EFP-Fin Trade</td> </tr> <tr> <td>1002</td> <td>EFP-Index-Futures Trade</td> </tr> <tr> <td>1004</td> <td>Block Trade At Market</td> </tr> <tr> <td>1006</td> <td>Xetra / Eurex Enlight Triggered Trade</td> </tr> <tr> <td>1007</td> <td>Block QTPIP Trade</td> </tr> <tr> <td>1017</td> <td>Delta Trade At Market</td> </tr> </tbody> </table>	Value	Description	1	Block Trade	2	Exchange For Physical	54	OTC	55	ExchangeBasisFacility	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index-Futures Trade	1004	Block Trade At Market	1006	Xetra / Eurex Enlight Triggered Trade	1007	Block QTPIP Trade	1017	Delta Trade At Market		
Value	Description																															
1	Block Trade																															
2	Exchange For Physical																															
54	OTC																															
55	ExchangeBasisFacility																															
1000	Vola Trade																															
1001	EFP-Fin Trade																															
1002	EFP-Index-Futures Trade																															
1004	Block Trade At Market																															
1006	Xetra / Eurex Enlight Triggered Trade																															
1007	Block QTPIP Trade																															
1017	Delta Trade At Market																															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
442	>MultiLegReporting- Type	N	1	86	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Single Security</td> </tr> <tr> <td>2</td> <td>Individual Leg Of A Multi Leg Security</td> </tr> </tbody> </table>	Value	Description	1	Single Security	2	Individual Leg Of A Multi Leg Security
Value	Description											
1	Single Security											
2	Individual Leg Of A Multi Leg Security											
28450	>MultiLegPriceModel	N	1	87	unsigned int	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Standard</td> </tr> <tr> <td>1</td> <td>User Defined</td> </tr> </tbody> </table>	Value	Description	0	Standard	1	User Defined
Value	Description											
0	Standard											
1	User Defined											
28873	>NonDisclosedTrade- Volume	N	8	88	QuantityType	Only valid during <i>TESTradSesStatus</i> (25044) 5 = Pre Close.						
</MDInstrumentEntryGrp>												
</MessageBody>												

Valid Values of SecurityTradingStatus (datatype SecurityTradingStatus)

Valid Value	Description
2	Trading Halt
200	Closed
201	Restricted
202	Book
203	Continuous
204	Opening Auction
205	Opening Auction Freeze
206	Intraday Auction
207	Intraday Auction Freeze
208	Circuit Breaker Auction
209	Circuit Breaker Auction Freeze
220	Circuit Breaker Auction Triggered By Static Limit Breach
221	Circuit Breaker Auction Triggered By Static Limit Breach Freeze
210	Closing Auction
211	Closing Auction Freeze
212	IPOAuction
213	IPOAuction Freeze
214	Pre Call
215	Call
216	Freeze
217	Trade At Close

**Implied Message Constants**



These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U23	3	Fixed String	Market Data Instrument
28842	MarketDataType	10	1	unsigned int	(Single) Instrument Snapshot
22	SecurityIDSource	M	1	Fixed String	Marketplace assigned identifier.

## Snapshot Order

Each individual order or quote is represented as a Snapshot Order in a snapshot cycle on the T7 Enhanced Order Book Interface snapshot channel. The format of the snapshot order enables participants to build the order book according to price-time priority.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeader>												
9	BodyLen	Y	2	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	2	unsigned int	Unique identifier for a T7 EOBI message layout. Value: 13602 (Market-DataOrder, MsgType = U21)						
34	MsgSeqNum	Y	4	4	unsigned int	Message sequence number, incremented per snapshot cycle per channel.						
</MessageHeader>												
<MessageBody>												
<OrderDetails>												
21008	TrdRegTSTime-Priority	Y	8	8	UTCTimestamp	Priority timestamp.						
1138	DisplayQty	Y	8	16	QuantityType	Quantity.						
54	Side	Y	1	24	unsigned int	Side of the order. <table border="1" data-bbox="991 1234 1409 1361"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Buy</td> </tr> <tr> <td>2</td> <td>Sell</td> </tr> </tbody> </table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
40	OrdType	N	1	25	unsigned int	Used for cash market instruments only. <b>1 = Market Order</b> Used for cash market instruments only. <table border="1" data-bbox="991 1563 1409 1648"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Market Order</td> </tr> </tbody> </table>	Value	Description	1	Market Order		
Value	Description											
1	Market Order											
25228	HHIIndicator	N	1	26	signed int	The index greater 0 of the HHI interval at the orders' price level, if the product is HHI enabled. <b>-1 = No Update</b> no change to the previous value sent for the same price level. <table border="1" data-bbox="991 1921 1409 2049"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>-1</td> <td>No Update</td> </tr> <tr> <td>*</td> <td>More values</td> </tr> </tbody> </table>	Value	Description	-1	No Update	*	More values
Value	Description											
-1	No Update											
*	More values											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
25020	Pad5	U	5	27	Fixed String	not used
44	Price	N	8	32	PriceType	Price.
</OrderDetails>						
</MessageBody>						

### Implied Message Constants

These constant values are to be considered as part of the above message, although they are not transmitted.

Tag	Field Name	Field Value	Length	Data Type	Description
35	MsgType	U21	3	Fixed String	Market Data Order
28842	MarketDataType	11	1	unsigned int	Order Book Snapshot
279	MDUpdateAction	5	1	unsigned int	Overlay

## A Appendix

### A.1 Product Scope

T7 EOBI interface is enabled for all derivative market products and most of the cash market products. The daily public reference data provided by T7 RDI and T7 RDF contains the list of products which are enabled for the T7 EOBI.

### A.2 Synthetic Prices

The order books for Futures products can be enabled for synthetic matching. Any incoming order can match synthetically against the order books enabled for synthetic matching. Information about whether a derivatives product is enabled for synthetic matching (*ImpliedMarketIndicator*), is published by public reference data in both in the Instrument Snapshot message and in the Complex Instrument Update message.

The T7 Functional Reference documentation describes the synthetic matching for futures spread and inter product spread instruments that are enabled for synthetic matching in detail. Furthermore in this document, the terms such as Match Path, Synthetic Book Path, Synthetic Pricing and available Quantity referring to Synthetic Book Path, are explained thoroughly. Additionally, the general rules for the calculation of a synthetic price are explained in-depth. For more details please see paragraph about Synthetic Matching in Continuous Trading.

## A.3 Connecting T7 EOBI and T7 ETI data

T7 EOBI and T7 ETI provide information to synchronize private responses and public market data.

### Order transactions

The Order time priority and matching engine in timestamp information is provided by both interfaces, i.e., *ExecID* field from T7 ETI in Order Status and Execution Reports and *TrdRegTSTimePriority* field from T7EOBI in incremental and snapshot messages along with the *securityID* information as shown in the table below:

Field Description	Public Market Data via T7 EOBI	Private Market Data via T7 ETI
Security Identifier	<i>securityID</i>	<i>securityID</i>
Priority Timestamp of an Order	<i>TrdRegTSTimePriority</i>	<i>TrdRegTSTimePriority</i> / <i>ExecID</i> for Standard orders <i>ExecID</i> for Lean orders
Matching Engine-In Timestamp	<i>AggressorTime</i>	<i>TrdRegTSTimeIn</i>
Gateway-In Timestamp	<i>RequestTime</i>	<i>RequestTime</i>
Match Step Identifier	<i>TrdMatchID</i>	<i>FillMatchID</i> <i>QuoteEventMatchID</i> <i>TrdMatchID</i>

Table

### 7 – Provided private and public data via interfaces

An order that is modified will lose its time priority, i.e., it will get a new priority time stamp, if its price, its quantity or order type is changed.

For Quotes the *QuoteResponseID*, which is the priority time stamp of the quote side, is delivered in *MassQuoteResponse* message by T7 ETI. For Quote activations the *MassActionReportID* in *QuoteActivationResponse* provides the transaction timestamp.

Please note, if a mass quote is modified, then the old time priority time stamp is provided by T7 ETI. Logically, if the time priority of an existing order doesn't change, then no order time priority information, *ExecID*, is provided by T7 ETI.

### Order executions

When an order executes against the order book at multiple price levels, this is reflected by a matching event with multiple match steps. Each match step includes the trades at one price level and is represented by an unique *TrdMatchID* (880) and published in the public market data.

The field *TrdMatchID* (880) is a unique id on product level for each business day. A synthetic match can result in more than one trade volume record with the same *TrdMatchID* (880).

Every match step occurring in the exchange has an identifier in T7 ETI that is provided in the field *FillMatchID* (28708) in the Execution Report (8), *QuoteEventMatchID* (8714) in the Quote Execution Report (U8) and *TrdMatchID* (880) in the Trade Capture Report (AE). The match time of all involved orders is reported in the Execution Summary message by using the field *ExecID* (17). These identifier allows participants to link trade capture reports

and the corresponding execution report of the T7 ETI with the market data incremental feed of the T7 EOBI.

The aggressor timestamp, whenever set, is always identical to the matching engine in timestamp.

## A.4 Multicast addresses for T7 EOBI

The reference information provided by T7 RDI contains the respective multicast channel information (i.e., multicast addresses and port numbers) for all available products for T7 EOBI.

For a full list of multicast addresses for T7 RDI reference data snapshot and incremental channels of all markets supported by the T7 trading architecture, please refer to the document Exchange and Settlement Network Access available at

[www.eurex.com](http://www.eurex.com) > [Support](#) > [Initiatives & Releases](#) > [T7 Releases](#) > [T7 Release 13.0](#) > [System Documentation](#) > [Network Access](#)

or

[www.xetra.com](http://www.xetra.com) > [Technology](#) > [T7 trading architecture](#) > [System documentation](#) > [Release 13.0](#) > [Network Access](#)

## A.5 Reference data for T7 EOBI

The reference data information such as order book type, multicast addresses and port numbers of corresponding products etc., which is needed to receive public market data via T7 EOBI, is available via the existing T7 RDI and/or the T7 RDF.

The Product Snapshot message will contain the following information for the products configured for T7 EOBI:

- Book Type, *MDBookType (1021)*, field will carry the valid value 3 = Order Depth,
- Feed Type, *MDFeedType (1022)*, field will carry the valid values HI = High bandwidth Incrementals for T7 EOBI incremental messages and HS = High bandwidth Snapshots for T7 EOBI snapshot messages in combination with the multicast addresses and port numbers,
- IP Multicast address, *PrimaryServiceLocationID (2567)*, field will carry the IP Multicast address of primary T7 EOBI feed along with the primary port number, *PrimaryServiceLocationSubID (28591)*.
- IP Multicast address, *SecondaryServiceLocationID (2568)*, field will carry the IP Multicast address of secondary T7 EOBI feed along with the secondary port number, *SecondaryServiceLocationSubID (28593)*.

Please note that the reference data is also provided in file form as compressed Reference Data Files (T7 RDF) in FIXML-layout, updated approximately every 5 minutes via the Common Report Engine (CRE).

## A.6 Packet classification in the IP protocol header

EOBI uses the IPv4 header Type of Service Field (TOS Field) to classify specific packets for special treatment. The layout of the TOS field as used within the context of T7 EOBI is compliant to RFC 2474 Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers. According to RFC 2474 the values for T7 EOBI usage are allocated from a pool of 16 code points (Pool 2) to be reserved for experimental or Local Use (EXP/LU) (0bxxxx1100).

DSCP (binary)	TOS (binary)	TOS (hex)	Description
0b000111	0b00011100	0x1C	<i>ExecutionSummary</i> message
0b001011	0b00101100	0x2C	Improved Bid/Ask Spread
0b001111	0b00111100	0x3C	<i>ExecutionSummary</i> message leading to an Improved Bid/Ask Spread
0b010011	0b01001100	0x4C	Widened Bid/Ask Spread
0b010111	0b01011100	0x5C	<i>ExecutionSummary</i> message leading to an Widened Bid/Ask Spread
0b011111	0b01111100	0x7C	<i>ExecutionSummary</i> message leading to a Moved Spread
0b100111	0b10011100	0x9C	<i>ExecutionSummary</i> message with <i>LastQty</i> (32) > 1.
0b101111	0b10111100	0xBC	<i>ExecutionSummary</i> message with <i>LastQty</i> (32) > 1 leading to an improved Bid/Ask Spread.
0b110111	0b11011100	0xDC	<i>ExecutionSummary</i> message with <i>LastQty</i> (32) > 1 leading to a widened Bid/Ask Spread.
0b111111	0b11111100	0xFC	<i>ExecutionSummary</i> message with <i>LastQty</i> (32) > 1 leading to a moved Spread.

Table 8 – TOS field layout as used within the context of T7 EOBI

If Differentiated Services Code Point (DSCP) is enabled for a specific trading partition,

- The bits leading to an *Improved* (0bxx1x11) or *Widened* (0bx1xx11) Bid/Ask spread are set for packets resulting from orders only.
- The *ExecutionSummary* bit (0bxxx111) is set for packets that contain at least one *ExecutionSummary* message. An execution leading further to a spread with either an improved or widened spread width (compared to the spread width before) will have either the bits set for an *ExecutionSummary* message leading to an Improved Bid/Ask Spread or resp. for an *ExecutionSummary* message leading to a Widened Bid/Ask Spread. If the spread width does not changed after an execution, but the spread has moved (compared to the spread before) all three bits for *ExecutionSummary*, Improved and Widened Bid/Ask Spread are set.
- The most significant bit (0b1xxx11) is set for packets where the *LastQty* (32) (total executed quantity) of the first *ExecutionSummary* message is greater than 1.

Please note that the exchange may change the interpretation of the DSCP bits at any time with prior notice.

## B Change log

Please consider, that the following list of change log entries only point to the section of the manual which are affected by the change and which should give more details about what has changed. Any change - even if not explicitly mentioned in the following Change log or the Manual - might have an impact on the byte layout of the affected messages. Please further note that a new field within a message may always move other fields and may change the byte padding according to the new layout. In addition to the affected manual section, the new layout and the full list of valid values could always be found within "T7Enhanced Order Book Interface - XML Representation". These files are available for download at

[www.eurex.com](http://www.eurex.com) > [Support](#) > [Initiatives & Releases](#) > [T7 Releases](#) > [T7 Release 13.0](#) > [System Documentation](#) > [Market & Reference Data Interfaces](#)

or

[www.xetra.com](http://www.xetra.com) > [Technology](#) > [T7 trading architecture](#) > [System documentation](#) > [Release 13.0](#) > [Market and Reference Data Interfaces](#).

Release	Chapter	Description
11.0.0	All	Applied several document formatting changes.
11.0.0	8.2	Updated packet header to 13000.
11.0.0	B	Removed change log for Release 8.0 and Release 8.1.
11.0.0	3.2, 4.2, 4.4, 4.5, 5, 8.4	Renamed field <i>TrdRegTSTimeIn</i> (21002) into <i>RequestTime</i> (5979) in messages <i>Order Add</i> , <i>Order Modify</i> , <i>Order Modify Same Priority</i> and <i>Order Delete</i> .
11.0.0	8.3	Added new field <i>TradingHHIIndicator</i> (25230) to the <i>Execution Summary</i> message.
11.0.0	8.4, 8.7	Added new field <i>HHIIndicator</i> (25228) to messages <i>Order Add</i> , <i>Order Modify Same Priority</i> , <i>Order Delete</i> , <i>Partial Order Execution</i> , <i>Full Order Execution</i> and <i>Snapshot Order</i> .
11.0.0	8.4	Added new field <i>HHIIndicator</i> (25228) and <i>PrevPriceHHIIndicator</i> (25231) to message <i>Order Modify</i> .
11.0.0	8.4	Added new message <i>TES Trade Report</i> with <i>TemplateID</i> 13203.
11.0.0	8.6	Added new message <i>Add Flexible Instrument</i> with <i>TemplateID</i> 13401.
11.0.0	8.3	Added new field <i>MDOriginType</i> (1024) to message <i>Trade Reversal</i> .
11.0.0	8.5	Added new field <i>TESTradSesStatus</i> (25044) to message <i>Product State Change</i> .



Release	Chapter	Description
11.0.0	8.5, 8.7	Added new field <i>TESSecurityStatus</i> (25045) to messages <i>Instrument State Change</i> , <i>Mass Instrument State Change</i> and <i>Instrument Summary</i> .
11.0.0	8.5, 8.7	Added new field <i>TESSecurityMassStatus</i> (35045) to message <i>Mass Instrument State Change</i> .
11.0.0	8.7	Added new fields <i>MDOriOriginType</i> (1024), <i>TrdType</i> (828), <i>MultiLegReportingType</i> (442), <i>MultiLegPriceModel</i> (28450) and <i>NonDisclosedTradeVolume</i> (28873) to message <i>Instrument Summary</i> . Added valid value 107 = Out of sequence (k) to field <i>TradeCondition</i> (277).
11.0.0	A.6	Added new DSCP valid value 0b0111111 (TOS 0x7C) for an <i>Execution Summary</i> message leading to a new spread with same width as before, but where the spread has moved compared to the spread before.
11.0.0	8.5, 8.6, 8.7	Added new valid value 11 = Commodity Strip to field <i>ProductComplex</i> (1227) for messages <i>Add Complex Instrument</i> , <i>Instrument Summary</i> and <i>Mass Instrument State Change</i> .
11.0.0	4.11	Added new paragraph about T7 Entry Service (TES) Trades.
11.0.0	8.6	Added new field <i>LastFragment</i> (893) to message <i>Add Complex Instrument</i> .
11.0.1	8.6	Added fields <i>SecurityDesc</i> (107), <i>MaturityDate</i> (541) and <i>StrikePrice</i> (202) to <i>Add Flexible Instrument</i> message. Please note that this change has impact on the wire layout of all fields following <i>TransactTime</i> (60)
11.0.1	8.6	Added field <i>SecurityDesc</i> (107) to <i>Add Complex Instrument</i> message. Please note that this change has impact on the wire layout of all fields following <i>TransactTime</i> (60).
11.0.1	A.6	Added new DSCP valid values for bit combinations 0b1xxx11 reflecting whether the corresponding EOBI datagram is triggered by an incoming order in a simple or in a complex instrument.
11.0.2	8.6	Changed data type of <i>OptAttribute</i> (206) from signed int to unsigned int.
11.0.2	8.5, 8.7	Changed presence attribute of <i>SecurityTradingStatus</i> (326) and <i>SecurityMassTradingStatus</i> (1679) from mandatory to optional.
11.0.2	8.3	Corrected typo in description of valid value 1006 = Xetra / Eurex Enlight Triggered Trade for field <i>TrdType</i> (828).
11.1.0	8.1	Changed Interface Version to 11.1. <i>Please note</i> there were no further interface or message layout changes between release 11.0 and 11.1.

Release	Chapter	Description
12.0.1	B	Removed change log for Release 9.0 and Release 9.1.
12.0.1	8.1	Changed Interface Version to 12.0.
12.0.1	8.6	Added field <i>QuantityScalingFactor</i> (28907) to message <i>Add Complex Instrument</i> . Please note that the byte layout changed for this message and the field <i>LastFragment</i> (893) was moved by 9 bytes to the end of the message.
12.0.1	8.6	Added new message <i>Add Scaled Simple Instrument</i> .
12.0.1	8.3	Added new valid value 1017 = Delta Trade At Market to field <i>TrdType</i> (828).
12.0.1	4.15, 8.3, 8.7	Removed valid value 155 = Midpoint price from field <i>TradeCondition</i> (277).
12.0.1	8.3, 8.7	Added valid value 743 = Retail price to field <i>TradeCondition</i> (277).
12.0.1	A.6	Changed the interpretation of the <i>simple</i> vs. <i>complex</i> DSCP bit 0b1xxx11.
12.0.1	8.3	The Layout of the <i>Execution Summary</i> has been changed. Please note that the field <i>AggressorTime</i> (2445) has been moved to the end of the message and a new group <i>RemainingOrderDetails</i> has been added before the existing field <i>RestingHiddenQty</i> (28868). Therefore applications <i>must</i> be adapted to the new byte layout.
12.0.2	B	Corrected document version references from 12.0.0 to 12.0.1 (T7 Release 12.0 Version 1).
12.0.2	8.3	Revised description for <i>Cross Request</i> .
12.0.3	8.5	Added valid value 12 = Scaled Simple Instrument to <i>InstrumentScopeProductComplex</i> (1544). Please note, this valid value was already added to <i>ProductComplex</i> (1227) with 12.0.1.
12.1.1	B	Removed change log for Release 10.0 and Release 10.1.
12.1.1	8.1	Changed Interface Version to 12.1.
12.1.1	8.2	Change <i>TemplateID</i> (28500) to 13003.
12.1.1	8.5, 8.6, 8.7	Added valid value 13 = Non-Standard Volatility Strategy to <i>InstrumentScopeProductComplex</i> (1544) from <i>Mass Instrument State Change</i> message, to <i>ProductComplex</i> (1227) from <i>Add Complex Instrument</i> message and to <i>ProductComplex</i> (1227) from <i>Instrument Summary</i> message.

Release	Chapter	Description
12.1.1	4.11, 8.3, 8.7	Removed valid value 50 = Portfolio Compression Trade from field <i>TrdType</i> (828).
12.1.1	8.5, 8.7	Added new valid values 220 = Circuit Breaker Auction Triggered By Static Limit Breach and 221 = Circuit Breaker Auction Triggered By Static Limit Breach Freeze to <i>SecurityTradingStatus</i> (326).
12.1.2	8.4	Changed usage of field <i>RequestTime</i> (5979) from <i>Order Modify Same Priority</i> message to <i>not</i> required.
12.1.3	4.15	Added comment about message availability with respect to <i>MarketSegmentStatus</i> (2542).
12.1.3	4.15	Modified paragraph to reflect new technical heartbeat service provided during weekends.
12.1.4	8.6	Added missing valid value 13 = Non-Standard Volatility Strategy to the table from <i>Add Complex Instrument</i> message.
13.0.1	8.3	Added new optional field <i>TransBkdTime</i> (483) to <i>TES Trade Report</i> .
13.0.1	8.3	Added new optional fields <i>NumberOfBuySides</i> (28911) and <i>NumberOfSellSides</i> (28912) to <i>TES Trade Report</i> .
13.0.1	8.3, 8.7	Added valid value 155 = Midpoint Price to field <i>TradeCondition</i> (277).
13.0.1	8.2	Change <i>TemplateID</i> (28500) to 13004.
13.0.1	8.6	Added field <i>ContractDate</i> (30866) to <i>Add Flexible Instrument</i> message.
13.0.1	8.6	Added field <i>ContractDate</i> (30866) to <i>Add Flexible Instrument</i> message.
13.0.1	A.1	Updated paragraph.